

## Die Fernsehsoftware aktualisieren

### Einführung

Philips verbessert kontinuierlich seine Geräte und davon können Sie auch noch nach Ihrem Kauf profitieren. Über einen USB-Stick (nicht im Lieferumfang) können Sie die Software von Ihrem Fernsehgerät upgraden. Diese Software-Aktualisierung können Sie selbst vornehmen.

### So bereiten Sie einen steckbaren Speicher für Software-Aktualisierungen vor

Was benötigen Sie dazu?

- Archivdienstprogramm, das das ZIP-Format unterstützt (z. B. WinZip für Windows).
- USB-Speicherstick mit mindestens 64 Mb freiem Arbeitsspeicher.

Software-Aktualisierungen können Sie downloaden von der Web-Site **[www.philips.com/support](http://www.philips.com/support)**.

1. Klicken Sie auf den **Download**-Pfeil oben links auf dem Bildschirm.
2. Speichern Sie das neueste Software-Upgrade auf Ihren Computer.
3. Klicken Sie zweimal auf die ZIP-Datei und kopieren Sie die Datei "autorun.upg" in das Hauptverzeichnis von Ihrem USB-Stick.


**Hinweis:** Verwenden Sie ausschließlich Software-Aktualisierungen, die auf der Website [www.philips.com/support](http://www.philips.com/support) zur Verfügung stehen.

## Die Fernsehsoftware aktualisieren (Fortsetzung)


### Die Fernsehsoftware aktualisieren

#### **Achtung:**


- Entfernen Sie den USB-Speicherstick nicht während der Software-Aktualisierung.
- Ziehen Sie, falls es während der Aktualisierung zu einem Stromausfall kommt, den USB-Speicherstick nicht aus dem Fernsehgerät. Wenn wieder Strom fließt, wird die Aktualisierung vom Fernsehgerät fortgesetzt.
- Wenn während der Aktualisierung ein Fehler auftritt, sollten Sie das Verfahren wiederholen oder wenn Sie weitere Unterstützung benötigen oder bei Problemen rufen Sie bitte das Philips- Infocenter an. Siehe Philips Kundendienst auf der Website [www.philips.com/support](http://www.philips.com/support).

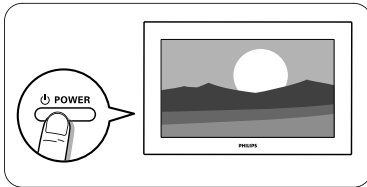


1. Schalten Sie das Fernsehgerät ein.

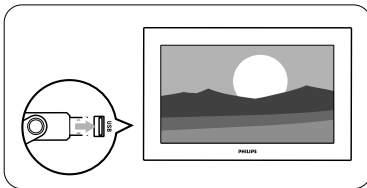

2. Stecken Sie den USB-Speicherstick in ein USB-Steckplatz des Fernsehgeräts.

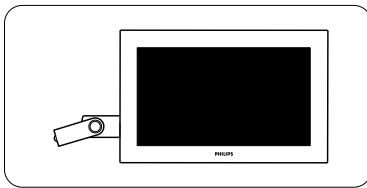


3. Das Fernsehgerät wechselt in den Standby-Modus. Der Bildschirm bleibt ungefähr 10 Sekunden schwarz. Bitte, warten Sie und drücken Sie die Netztaaste des Fernsehgeräts nicht.

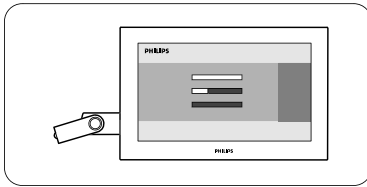


4. Der Aktualisierungsvorgang startet automatisch. Bitte, warten Sie.


## Die Fernsehsoftware aktualisieren (Fortsetzung)

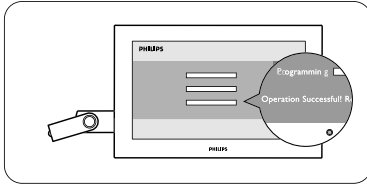


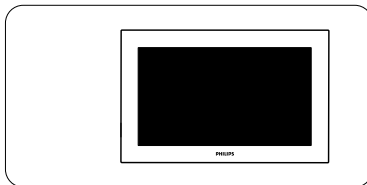
5. Die Aktualisierung war erfolgreich, wenn auf dem Bildschirm die Meldung 'Operation successful' (Vorgang erfolgreich) angezeigt wird.

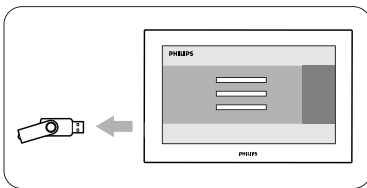


6. Entfernen Sie den USB-Speicherstick aus dem Fernsehgerät.

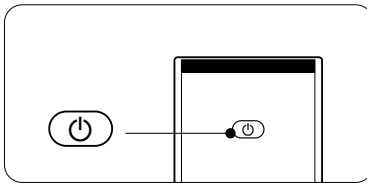

7. Drücken Sie auf der Fernbedienung die Taste . Drücken Sie nicht mehr als ein Mal. Drücken Sie die Netztaste des Fernsehgeräts nicht.



8. Das Fernsehgerät wechselt in den Standby-Modus. Der Bildschirm bleibt ungefähr 10 Sekunden schwarz. Bitte, warten sie.

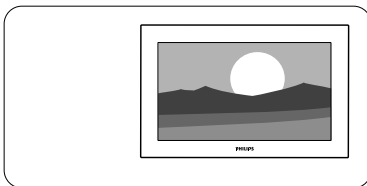

9. Das Fernsehgerät schaltet sich automatisch wieder ein. Die Aktualisierung ist abgeschlossen.

10. Nach der Aktualisierung können Sie die Fernsehsoftware über den PC vom USB-Speicherstick entfernen.

## Software history

### Main modifications

#### Each release contains:

- All solutions identified in earlier versions
- Improved connectivity to improve compatibility with other external devices

#### Q5492\_0.26.72.0

- Improvement picture freeze/macro blocks on ARD-HD + ZDF-HD via DVB-C.

#### Q5492\_0.26.71.0

- Solving picture freeze/macro blocks on ARD-HD + ZDF-HD via DVB-C.

#### Q5492\_0.26.70.0

- Improvement on CI+ performances.

#### Q5492\_0.26.69.0

- Solving Italian broadcast issue.

#### Q5492\_0.26.66.0

- Automatic Channel Installation - all presets shifted by one.
- IP-EPG is available again.
- case of 'undefined' OSD resolved.
- 'no TXT on RTL4' - Teletext performance enhanced.
- Yellow button forwarded to NetTV.(RTL gemist service)
- Robustness of subtitles improved.
- Higher number of EPG channels.
- Parental rating applicable for Radio.
- Improved network connectivity with some routers.

#### Q5492\_0.26.58.5

- Introduction of the extra feature named Interactive TV via the " Red Button " on the remote control, initially, the feature works for Dutch channels on those TVs in the **Netherlands** without a set-top box. Interactive TV will not be offered in the **UK**, as the red color key is used for other interactive applications (MHEG)
- Solution for Automatic Channel Installation on the UPC network in the Netherlands.
- Except for the 56PFL9954H/12, the feature Scenea can be used. (Scenea is a new feature, which allows you to use your TV as a big photoframe. By selecting Scenea you will see a butterfly, this is the standard Scenea picture. You can load your personal picture by watching it in the content browser, pressing the options key, navigating down to "Set as Scenea ". Then your personal picture will get stored as the "Scenea picture", so from then onwards when choosing Scenea in the Home menu you will see your personal picture. In Scenea, any key press returns you to "Watch TV". The maximum displaying time in Scenea is 240 minutes. A few minutes before the set switches of a message is displayed to warn the customer.

- Improved cam authentication.

#### Q5492\_0.26.38.22

- Support for DVB-S2 box.
- resolves installation issue on DVB-C and analog networks in the Netherlands and Germany.

#### Q5492\_0.26.38.13

- Full DVB-C Austria & Switzerland availability.
- Improvement of robustness of the side control. After updating this software the operation of the side control can be slightly different as before. It might be that the TV needs a confirmation of the key press. This means, the first press activates the side control, while the second press executes the action. During 15 seconds the side control will operate immediately on the key press. Afterwards, again the activation is needed.

#### Q5492\_0.26.33.14

- Solving video drop outs when changing channels on external set-top box.

#### Q5492\_0.26.33.12

- Reliability for Net TV improved.

#### Q5492\_0.26.33.9

- Improvement.avi media via WIFI in the Netherlands.
- Sound improvements for France.
- Possibility to swith off the digital channel update in standby mode.

#### Q5492\_0.26.29.6

- For France:Canal+decoder:solution for the preset sometimes skipped after using back key or after standby.
- Improvement on the startup behavior of the NetTV functionality .
- This software is RikstV certified.
- Improved installation behaviour for DVB-C countries Netherlands & Austria.
- DGTVi certified.

#### Q5492\_0.26.24.8

- HD simulcast presets are not misplaced anymore by an overnight update installation.
- improved USB Browse stability.
- DVB-T MPEG4 support for Slovenia.