

De TV-software upgraden

Inleiding

Philips probeert voortdurend haar producten te verbeteren en streeft ernaar u hiervan te laten profiteren, zelfs na uw aankoop. Daarom kunt u uw TV-software met behulp van een USB-apparaat (niet meegeleverd) upgraden. U kunt de upgradeprocedure zelf uitvoeren.

Een draagbaar geheugen voorbereiden op een software-upgrade

Wat hebt u nodig ?

- Een archiveringsprogramma dat compatibel is met het ZIP-formaat (bijv. WinZip voor Windows).
- Een USB geheugenstick met minimaal 64 Mb beschikbaar geheugen.

U kunt de software-upgrade downloaden via de website **www.philips.com/support**.

1. Klik op het pijltje **Download** in de linker bovenhoek van uw scherm.
2. Bewaar het meest recente software upgrade bestand op uw computer.
3. Dubbelklik op het zip-bestand en kopieer het bestand "autorun.upg" naar de hoofddirectory van het draagbare USB-apparaat.


Opmerking: gebruik enkel software-upgrades die u op de www.philips.com/support website vindt.

De TV-software upgraden (vervolg)


Televisie upgraden

Waarschuwing:


- Tijdens het upgraden van de software mag u de USB-stick niet verwijderen.
- In geval van een stroomonderbreking tijdens het upgraden mag u de USB-stick niet uit het TV-toestel verwijderen. De upgrade wordt vervolgd zodra er weer stroom is.
- Als tijdens het upgraden een fout optreedt, probeer de procedure dan opnieuw op te starten of indien u meer hulp wenst of in geval van problemen, gelieve uw lokale Philips Klantencentrum te contacteren. Zie Philips Klantenservice op de website www.philips.com/support.

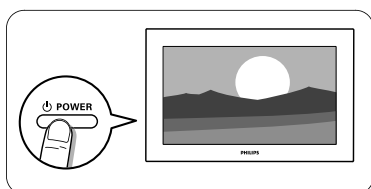


1. Schakel de TV in.

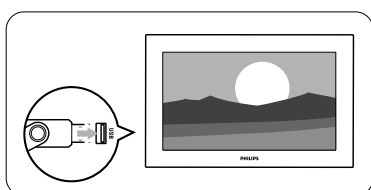

2. Plaats de USB Memory Stick in een USB-aansluiting van de TV.

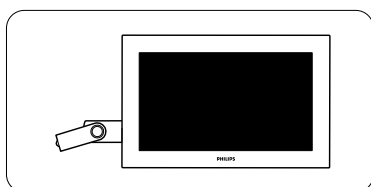


3. De TV schakelt naar de standby-modus. Het scherm blijft ongeveer 10 seconden zwart. Een ogenblik geduld aub. Druk niet op de aan-uitschakelaar van de TV.

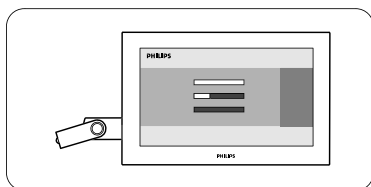


4. De upgraden start automatisch. Een ogenblik geduld aub...


De TV-software upgraden (vervolg)

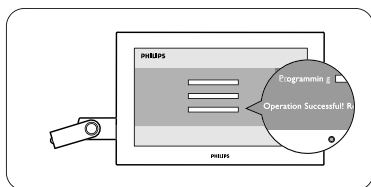


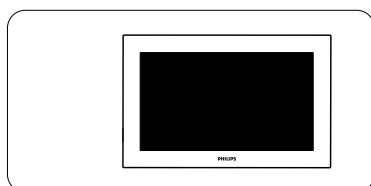
5. Het upgraden is voltooid als het bericht "**Operation successful**" (Bewerking voltooid) op het scherm wordt weergegeven.

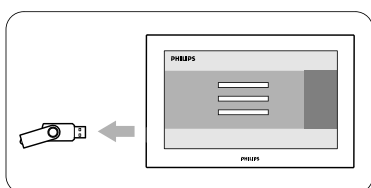


6. Verwijder de USB Memory Stick uit de TV.

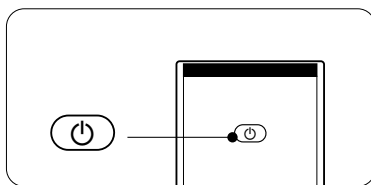

7. Druk op de toets  op de afstandsbediening. Druk niet meer dan één keer op deze toets. Druk niet op de aan-uitschakelaar van de TV.



8. De TV schakelt naar de standby-modus. Het scherm blijft ongeveer 10 seconden zwart. Een ogenblik geduld aub.

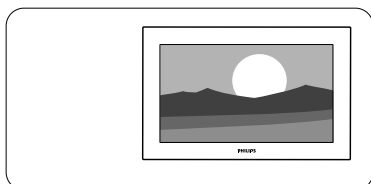

9. De TV wordt weer automatisch ingeschakeld. Het upgraden is voltooid.

10. Na de upgrade kunt u met uw PC de TV-software van uw USB-stick verwijderen.

Software history

Main modifications

Each release contains:

- All solutions identified in earlier versions
- Improved connectivity to improve compatibility with other external devices

Q5492_0.26.70.0

- Improvement on CI+ performances.

Q5492_0.26.69.0

- Solving Italian broadcast issue.

Q5492_0.26.66.0

- Automatic Channel Installation - all presets shifted by one.
- IP-EPG is available again.
- case of 'undefined' OSD resolved.
- 'no TXT on RTL4' - Teletext performance enhanced.
- Yellow button forwarded to NetTV.(RTL gemist service)
- Robustness of subtitles improved.
- Higher number of EPG channels.
- Parental rating applicable for Radio.
- Improved network connectivity with some routers.

Q5492_0.26.58.5

- Introduction of the extra feature named Interactive TV via the " Red Button " on the remote control, initially, the feature works for Dutch channels on those TVs in the **Netherlands** without a set-top box. Interactive TV will not be offered in the **UK**, as the red color key is used for other interactive applications (MHEG)
- Solution for Automatic Channel Installation on the UPC network in the Netherlands.
- Except for the 56PFL9954H/12, the feature Scenea can be used. (Scenea is a new feature, which allows you to use your TV as a big photoframe. By selecting Scenea you will see a butterfly, this is the standard Scenea picture. You can load your personal picture by watching it in the content browser, pressing the options key, navigating down to "Set as Scenea ". Then your personal picture will get stored as the "Scenea picture", so from then onwards when choosing Scenea in the Home menu you will see your personal picture. In Scenea, any key press returns you to "Watch TV". The maximum displaying time in Scenea is 240 minutes. A few minutes before the set switches of a message is displayed to warn the customer.
- Improved cam authentication.

Q5492_0.26.38.22

- Support for DVB-S2 box.
- resolves installation issue on DVB-C and analog networks in the Netherlands and Germany.

Q5492_0.26.38.13

- Full DVB-C Austria & Switzerland availability.
- Improvement of robustness of the side control.
After updating this software the operation of the side control can be slightly different as before. It might be that the TV needs a confirmation of the key press. This means, the first press activates the side control, while the second press executes the action. During 15 seconds the side control will operate immediately on the key press. Afterwards, again the activation is needed.

Q5492_0.26.33.14

- Solving video drop outs when changing channels on external set-top box.

Q5492_0.26.33.12

- Reliability for Net TV improved.

Q5492_0.26.33.9

- Improvement.avi media via WIFI in the Netherlands.
- Sound improvements for France.
- Possibility to swith off the digital channel update in standby mode.

Q5492_0.26.29.6

- For France:Canal+decoder:solution for the preset sometimes skipped after using back key or after standby.
- Improvement on the startup behavior of the NetTV functionality .
- This software is RikstV certified.
- Improved installation behaviour for DVB-C countries Netherlands & Austria.
- DGTVi certified.

Q5492_0.26.24.8

- HD simulcast presets are not misplaced anymore by an overnight update installation.
- improved USB Browse stability.
- DVB-T MPEG4 support for Slovenia.