


Philips Hue White  
Starter kit E26

**4 x E26 bulb**

Bridge included  
Warm white light (2700K)

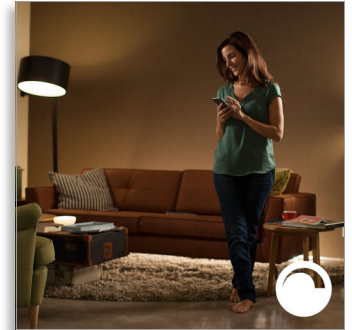

46677472009

# Automate your lights

for peace of mind

This Philips Hue white starter kit contains 4 bulbs and a bridge. It allows you to control the light from anywhere in the world if you have internet, or you can automate them to make it seem like you're home when you're not.

## Easy control and comfort

- Smart control, home and away
- Set timers for your convenience
- Installation free dimming
- Control with your voice



# PHILIPS

## Starter kit E26

4 x E26 bulb Bridge included, Warm white light (2700K)


# Highlights

### Smart control, home and away




With the Philips Hue iOS and Android apps you can control your lights remotely wherever you are. Check if you have forgotten to switch your lights off before you left your home, and switch them on if you are working late.

### Timers for your convenience




Philips Hue can make it seem like you're home when you're not, using the schedule function in the Philips Hue app. Set the lights to come on at a pre-set time, so the lights are on when you arrive home. You can even set rooms to light up at different times. And of course, you can let the lights turn off gradually in the night, so you never have to worry whether you've left any lights on.

### Installation free dimming



Experience guaranteed smooth dimming with Philips Hue. Not too bright. Not too dark. Just right. No need for wires, an electrician or installation

### Control with your voice



Philips Hue works with Amazon Alexa, Apple HomeKit and Google Home, powered by the Google Assistant, to allow you to control your lights with your voice. Turn your lights on and off. Dim to the desired brightness for a perfect ambiance. Even recall pre-set scenes, change colors and more - all without lifting a finger.

46677472009

# Specifications

### The bulb

- Lifetime: 25000 hour(s)
- Wattage: 9,5 W
- Input voltage: 110V-130V
- Lumen output: 840 lm
- Software upgradable: when connected to Hue bridge
- Start up: Instant 100% light output
- Max. standby power: 0,2 W
- Color temperature: 2700K
- Diameter: 2,4 inch
- Fitting: E26
- Form factor: A19
- Height: 4,3 inch

### The bridge

- Power adapter: 100–240 V AC / 50–60Hz
- Frequency band: 2400-2483,5 MHz
- Height: 1 inch
- Max. number of accessories: 12
- Max. number of bulbs: 50

### Environmental

- Operational humidity: 5% < H < 95% (non condensing)
- Operational temperature: -10°C – 45°C

### Guarantee

- 3 years

### The switch

- Batteries included: 1 x CR2450
- Frequency band: 2400-2483,5 MHz
- Lifetime: 50.000 clicks
- Max. lights per switch: 10 if not linked to Hue bridge
- Minimal battery lifetime: min 3 year(s)
- Software upgradable: when connected to Hue bridge
- Switch depth: 11 mm
- Switch height: 92 mm
- Switch width: 35 mm
- Wall plate depth: 14 mm
- Wall plate height: 115 mm
- Wall plate width: 70 mm
- Zigbee Light link: protocol IEEE 802.15.4

### What's in the box

- Bridge: 1
- Ethernet network cable: 1
- Hue white bulbs: 4
- Power adapter: 1



Issue date 2018-03-18

Version: 2.0.1

12 NC: 9290 011 36961

© 2018 Philips Lighting Holding B.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Philips Lighting Holding B.V. or their respective owners.

[www.philips.com](http://www.philips.com)