


STEREO RADIO CASSETTE PLAYER

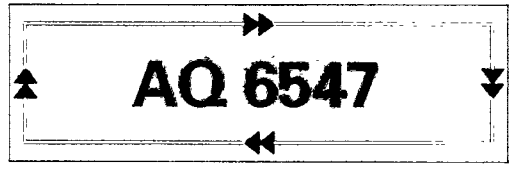

STEREO RADIO CASSETTE PLAYER

Basic Specification

- Digital AM/FM stereo tuner
- 10 station presets (5 FM, 5 AM)
- Dynamic Bass Boost
- Automatic stop
- Detachable belt clip
- Stereo headphones
- High quality finishing



Let's make things better.



PHILIPS

CASSETTE DECK

- 3-key stereo cassette deck
- Full automatic stop

TUNER

- Digital tuner with 10 station presets (5 FM, 5 AM)
- Wavebands : AM/FM/FM stereo
- Frequency ranges : FM 87.5 -108 MHz
: AM 526.5 - 606.5 kHz
- Wire aerial for FM via headphone cord
- Ferroceptor for AM

AMPLIFIER

- Max. output power : 2 x 5 mW RMS
- Dynamic Bass Boost (2 position)

DISPLAY

- 5-digit LCD
- Indicator for band, frequency, memory and stereo

POWER SUPPLY

- Batteries : 2 x 1.5V , type AA/R6/UM3 cell
- External supply : 3V DC

CONNECTIONS

- Headphone socket : 3.5 mm
- DC in : 3.4 mm, 3 V, centre "-"

ACCESSORIES

- Stereo headphone
- Detachable belt clip

GENERAL

- Material : Polystyrene
- Weight : 195 g (excluding batteries)
- Dimensions (mm) : 119 mmW x 90 mmH x 40 mmD
- Displaybox dimensions : 168 mmW x 131 mmH x 55 mmD
- Quantity /mastercarton : 6

FEATURES DESCRIPTION**• Dynamic Bass Boost**

Dynamic Bass Boost (DBB) is an electronic device that enhances bass frequencies. When played at low volume, music can lose its "bottom end". By increasing specific bass frequencies, DBB enables listeners to play music at a low volume while still enjoying a warm bass sound.

3122 321 7314 2

Subject to modification without notice

**PHILIPS**