

1

2

3

4

5

6


A

Diagonal Die-cut 5.0x5.0 mm on release liner. So that this triangular portion is not sticking on the panel. The small triangular release liner still remain on the sticker with the label is pasted on the panel. - Ease for removing the sticker from the panel.

60⁰_{-0.5}120⁰_{-0.5}

5 mm

5 mm

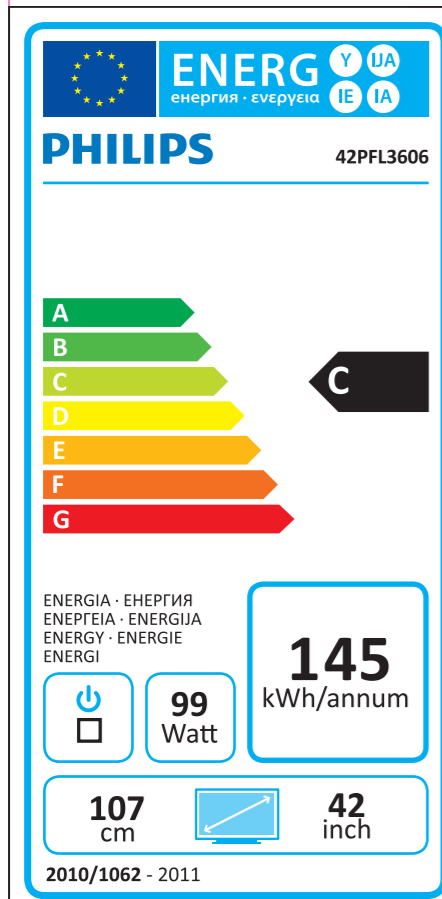

FRONT SIDE



REAR SIDE

產品說明書 SPECIFICATIONS

品名 Article Name	特多龍商標紙 (白色, 可移除性) Polyster Film Label (White, removable)	構造示意 Construction	
-----------------------	--	----------------------	--

I . 產品物性 (The Properties of Product, ELW⁵⁰ ERT50R3)

1 初期力	Tack(PSTC-6)	5 ↑	cm	2 粘著力	Adhesion	120 ↓	g/l"
3 保持力	Cohesion forces	***	hrs/1" x1"	4 剝離力	Release force	1~12	g/l"
5 膠厚	Coating thickness	15±3	μ	6 上膠量	Dry coating weight	18±4	g/m ²
7 殘餘溶劑	Solvent residual	1.0 ↓	%	8 耐候性	Weather resistance		
9 再貼性	Re-Adhesion	OK		10 適用溫度	Temp range	-10~100	°C
11 耐溶劑	Solvent resistance	OK		12 膠類	Adhesive base		Acrylic Adhesive

II . 原物料物性 (The Properties of Raw Materials) 測試條件: 23°C; 65%RH

中文	English Name	面層 (Surface Material)	底層 (Liner)
1 品名	Article name	Polyester Film	Polyester Film
2 基重	Basic Weight	70±5g/m ²	70±5g/m ²
3 厚度	Thickness	50±5μ	50±5μ
4 顏色	Color	White	Transparent
5 平滑度	Smoothness	Good	Good
6 印刷性	Printability	Good	Good
7 抗水度	Moisture resistance	Good	Good
8 斬性	Die cutting	Good	Good

MODEL: 42PFL3606H		PROE 3D:	PROE 2D:
UNIT mm	TOLERANCES UNLESS OTHERWISE STATED DIMENSIONS ANGLE +/- 0.2 +/- 0.5	MATERIAL	
SCALE 1.000	3rd PROJ. 	TREATMENT	Printing Color: CMKY color
LABEL_ENERGY_PANEL		P40G0002813G7	
DRAWN	HOLDEN KAO	DATE	2011-03-25
CHECK	JS LEU	DATE	2011-03-25
		TPV Technology Ltd.	
		A	-----
		110	1-1 A3
		CL	

Printing Color Please refer to the Official Journal of the Europe Union and Commission Delegated Regulation (EU) No 1062/2010 of 28 September 2010 supplementing Directive 2010/30/EU of the European Parliament and of the Council with regard to energy labeling of televisions, **L314/64**.

COMPLY WITH
RoHS

1

2

3

4

5

6

D

D