

*Xalio*



**PHILIPS**

# Safety information

This product may be used legally only in a country where the appropriate authority has given its specific authorisation. This authorisation appears on a label at the back of the charger.

The **CE** marking on the product certifies its conformity with the technical regulations for user safety and electromagnetic disturbance which were applicable on the date of approval in accordance with European Union Directive No. N°91/263/EEC.

## Power requirements

This product requires an electrical supply of 230 volts, alternating monophased current, excluding IT installations defined in standard EN 60-950.

## Warning:

The electrical network is classified as excessive according to criteria in the standard EN41-003.

The only way to power down this product is by unplugging the power cable from the electrical outlet. Make sure the electrical outlet is located close to the apparatus and is always easily accessible.

It is recommended that this telephone be used as a complement to another telephone which does not require mains power.

## Telephone connection

The voltage on this network is classified as TNV (Telecommunication Network Voltages, as defined in the standard EN 41-003).

## Safety precautions

- Do not allow the handset to come into contact with water.
- Do not open the handset or the charger. This could expose you to high voltages. Contact our after-sales service for all repairs.
- Do not allow the charging contacts or the battery to come into contact with conductive materials such as keys, paper clips, rings, bracelets, etc.

# Contents

<b><i>Introduction</i></b>	<b>2</b>
<b><i>Installing your extra handset</i></b>	<b>3</b>
Deciding where to put the charger	3
Installing the charger on a horizontal surface	3
Mounting the charger on a wall	5
Charging your handset	6
Subscribing your handset to your Xalio base station	7
<b><i>Using your Xalio</i></b>	<b>9</b>
Making an outside call	9
Answering an outside call	9
Making an internal call	10
Answering an internal call	10
Using the handset loudspeaker	10
Setting up Baby Sit (Xalio 6820 & 6850 only)	11
Transferring calls	12
Switching on the battery saver	13
Switching off the battery saver	13
<b><i>Maintenance</i></b>	<b>14</b>
Changing the battery	14
Caring for your handset	15

# Introduction

The **Xalio 6800** is an extra handset for the Xalio digital cordless telephone.

The **Xalio 6820** is an extra handset for the Xalio Plus digital cordless telephone.

The **Xalio 6850** is an extra handset for the Xalio Vox digital cordless telephone with answering machine.

Your Xalio 6800/6820/6850 comprises:

- a charger
- a handset
- a power cable

This guide shows you how to install and use your extra Xalio handset.

Please refer to the corresponding Xalio user manual for information on:

- using the phonebook
- using the emergency number
- using the answering machine (Xalio Vox only)
- troubleshooting


# Installing your extra handset

## Deciding where to put the charger


- Place the charger near a mains outlet supplying 230V at 50Hz.
- To reduce to a minimum any interference with other electronic devices such as telephones, televisions, screens, etc. we advise you to place your charger at least 50cm from any other electronic device.
- Place the charger on a flat surface as with the base station or mount it on a wall.
- Significant obstacles such as concrete walls or metallic supports (windows and door frames, partitions, etc.) will lessen the communication range between the base station and the handset.

## Installing the charger on a horizontal surface

- 1 Plug the power cable into the charger.

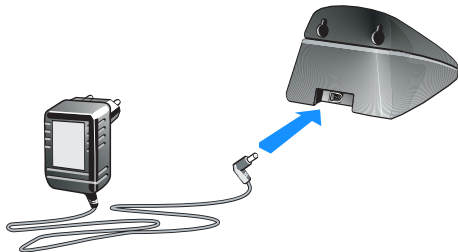

**2 Plug the power cable into the wall socket.**





**3 Place the handset in the charger.**



# Mounting the charger on a wall

- 1** Fix the screws (not supplied) according to the diagram below.

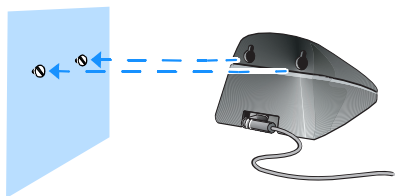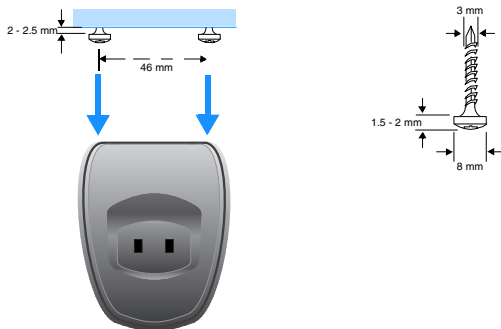



- 2** Plug the power cable into the charger as shown on page 3.
- 3** Mount the charger on the screws.
- 4** Plug the power cable into the wall socket as shown on page 4.
- 5** Place the handset in the charger.

## **Charging your handset**

Your handset is powered by a rechargeable battery.

**Before you use your handset for the first time, charge it for at least 12 hours.** This precaution helps to lengthen the life of the battery.

To charge the handset, place it on the charger or on the base station. The  symbol will appear on the display to indicate that the battery is charging.

When the  symbol disappears, your handset is fully charged.

The charger must be connected to a power supply using the power cable supplied.

### **Tip**

To ensure an optimum handset charge, replace the handset on the charger regularly.



## **Subscribing your handset to your Xalio base station**

Before you can use your handset, you must subscribe it to your base station.

- 1 Press the  button on the base station for 10 seconds.**

The base station beeps to indicate that it is now in subscription mode.

- 2 Move the handset to be subscribed close to the base station and press R/ to enter menu mode.**

- 3 Press  until SUBSCRIBE is displayed.**

- 4 Press OK.**

The handset will search for a base station that is in subscription mode.


After a few seconds, the name or ID number of the base station will be displayed. In this case go to the next step.

If it cannot find one, **NO BASE** will be displayed and you will need to try again.

- 5 Press OK again.**  
**CODE?** will be displayed.

- 6 Enter the subscription code (1590) on the handset keypad.**

- 7 Press OK.**

If the base station has a name, this will be displayed. When you first use your telephone, the base station name is PHILIPS. You can delete the existing name using the  key. If the base station has no name, **BASE NAME?** will be displayed.

**8 Enter a name (maximum 8 characters) on the handset keypad.**

If you do not enter a name, the base station keeps its existing name.

You can enter characters by pressing the key with the required character on it one or more times. These characters are printed on the handset keypad. If you wish to enter two successive characters which are on the same key, you need to distinguish them by pressing the ▲ key between the two characters. You delete a character with the ▼ key.

For example: to enter PHILIPS 1 you would press the following keys.

T ▲ 44 444 555 666 T ▲ 7777 I ▲ 111 OK  
P H I L I P S Space 1

**9 Press OK.**



**10 The new handset beeps to confirm that it has been subscribed successfully.**

**11 Press R/↵ to leave menu mode.**





# Using your Xalio

## Making an outside call



### Direct dialling

- 1 Press the  key on the handset.
- 2 Dial the number using the number keys.
- 3 To hang up, press  or replace the handset on the base station or charger.

### Dialling with number preparation






- 1 Dial the number before pressing the  key. You can use the  key to make corrections by cancelling the last digit entered.
- 2 Press the  key on the handset.
- 3 To hang up, press  or replace the handset on the base station or charger.

## Answering an outside call



- 1 Press the  key on the handset or simply lift it off the base station or charger.
- 2 To hang up, press  or replace the handset on the base station or charger.







## Making an internal call

When you have more than one handset you can make internal calls free of charge between handsets subscribed to the same base station.

- 1 Press**  .
- 2 Dial the number of the handset you want to call.**  
This is the single-digit number shown on its display.
- 3 To hang up, press**  (or  ) **or replace the handset on the base station or charger.**





## Answering an internal call

When another handset calls you, your handset will ring with the internal call melody, the   symbol will blink on the display and the number of the handset calling you will be displayed.

- 1 Press**  (or  ) **or simply lift the handset off the base station or charger.**
- 2 To hang up, press**  (or  ) **or replace the handset on the base station or charger.**

## Using the handset loudspeaker (Xalio 6820 & 6850 only)

Your handset is fitted with a loudspeaker to allow other people with you to listen to the conversation.

- 1 During a call, press** .
- 2 You can adjust the sound volume of the loudspeaker when it is on by pressing**  **or** .
- 3 To turn off the loudspeaker, press**  **again.**

## **Setting up Baby Sit (Xalio 6820 & 6850 only)**

The Baby Sit function allows you to monitor sounds in another room (e.g. the baby's room). Because Baby Sit is a special type of internal call, it requires two handsets (of type Xalio 6820 or Xalio 6850): one left in the baby's room and one you keep with you (the parent handset).

### **Setting a handset in Baby Sit mode**

In order to use Baby Sit, you must first set the handset to be left in the room to be monitored (e.g. the baby's room) in Baby Sit mode.

- 1** Press **R/↵** to enter menu mode.
- 2** Press **▼** until **HS SETUP** is displayed.
- 3** Press **OK** until **INTERCOM** is displayed.
- 4** Press **▲** or **▼** to select **BABY SIT**.
- 5** Press **OK**.




Your handset beeps to indicate that the setting has been changed.

Press **R/↵** to exit menu mode.





### **Note:**




The handset in Baby Sit mode will not ring but can be used to make and receive calls.

## Using Baby Sit

- 1 Place the handset in Baby Sit mode in the room you want to monitor (e.g. the baby's room).
- 2 Using the other (parent) handset, press   and the number of the handset in Baby Sit mode.
- 3 Turn on the loudspeaker of the parent handset by pressing .






### Note:

If you receive an outside call while you are using the Baby Sit function neither the handset in Baby Sit mode nor the handset you are using to monitor sounds will ring. However, the base station will ring and you will hear a call waiting tone on the parent handset. To take the call, use the parent handset and press   then  or press  twice.

To use Baby Sit again, press  to end your outside call and then   followed by the number of the handset in Baby Sit mode.

## Transferring calls

You can transfer an outside call from one handset to another handset subscribed to the same base station.

- 1 During the call, press  .
- 2 Dial the number of the handset to which you wish to transfer the call.
- 3 Once the other handset answers, you can either:
  - Transfer the call by pressing .
  - Switch back and forth between the other handset and your outside call by using  .

## **Switching on the battery saver**

Use the battery saver if you want to use the handset away from the base station or charger for a long period of time (up to a week).

**Press the OK key for 5 seconds.**


Your handset will beep and switch to battery saver mode.

**On the 6820, press the  key for more than 1 second.**

### **Note:**

In battery saver mode the handset will not ring. However, if someone calls, the base station will ring.

## **Switching off the battery saver**

- The battery saver will switch off as soon as you press a key.
- If you want to answer a call with a handset in battery saver mode, simply press the  key for one second and wait a few seconds to be connected.
- The battery saver mode will also switch off if you place your handset on the base station or charger. The handset will start to recharge if necessary.

# Maintenance

## Changing the battery

From time to time, you may need to replace the battery installed on your handset.

You can obtain a new battery from your Philips dealer.



**1** Slide the battery cover down as shown in the diagram below.

**2** Disconnect the battery.

**3** Put the new battery in place and connect it.

**4** Slide the battery cover back in place until it clicks into position.

## Warning!



Your handset battery contains cadmium. Check your local regulations for special disposal instructions.



## ***Caring for your handset***

To clean your handset or charger, first unplug the mains cable. Wipe with a cloth or chamois moistened with slightly soapy water, then with a dry cloth.

### ***Note:***

Never spray your handset or charger with cleaning products or solvents.

Clean the charging contacts on the handset and the charger using a dry lint-free cloth.