



Philips Signage Solutions  
D-Line Display

43"

Powered by Android  
450cd/m<sup>2</sup>

**Signage**Solutions

43BDL4050D

## Chasing innovation

powered by Android

Amaze your guests with a smarter, faster, signage display. With integrated WiFi and capable of running Android apps, it's the next evolution in signage solutions.

### **Innovative solutions for any signage application**

- Android: Run your own app or choose your favorite app to run
- Integrated WiFi
- Free and easy-to-use content management with SmartCMS

### **Maximizing the impact of your message**

- Connect and control your content via the cloud
- Enhance your connectivity with an integrated mPCIe slot.

### **Care about you, your business and your audience**

- Keep your content up and running with FailOver
- SmartPower for energy saving
- Ensure your content is running with automatic screenshots

**PHILIPS**

# Highlights

## Powered by Android

With Android OS integrated into the display, you can work with the most developed OS on the planet and save your own app directly into the display. Or, choose from the large library of Android apps and play content from there. With the built-in scheduler, you can daypart your apps and content based on your customer and time of day and with the auto orientation feature, showing content in portrait or landscape is as simple as turning the display.

## SmartBrowser



Connect and control your content via the cloud with the integrated HTML5 browser. Using the Chromium based browser, design your content online and connect a single display, or your complete network. Show content in both landscape and portrait mode, with fullHD resolution. Streaming content can also be shown in a PIP (picture-in-picture) window. Simply connect the display to the internet using WiFi or with an RJ45 cable, and enjoy your own created playlists

## FailOver



Keeping your content up and running is critical for demanding commercial applications. While it is unlikely you will face a content disaster, FailOver provides content protection with a revolutionary technology that plays back-up content on screen in the event of a media player failure. FailOver automatically kicks in when the primary input fails. Simply select a primary input connection and a FailOver connection and your ready for instant protection.

## SmartPower



The backlight intensity can be controlled and pre-set by the system to reduce the power

consumption by up to 50%, which saves substantially on energy costs.

## PCI Slot

With an integrated PCI slot, you can connect a WiFi/bluetooth or 4G LTE module, allowing for even greater communication with the display. Machine to machine communication is also enhanced, with numerous configurations available for customers to use, such as the ability to expand product features or signal-handling capability.

## Proof of Play

Content is king, and with the automatic screenshot feature, you can make sure that your content is up and running at all times. Screenshots are taken throughout the day, which are then stored in the FTP server. From there, the screenshots can be viewed no matter when, or where you are.

# Specifications

## Picture/Display

- Diagonal screen size: TBD inch / TBD cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60Hz
- Brightness: 450 cd/m<sup>2</sup>
- Contrast ratio (typical): 1100:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Response time (typical): 12 ms
- Pixel pitch: 0.49 x 0.49 mm
- Display colors: 1.07 billion
- Viewing angle (H / V): 178 / 178 degree
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D MA Combfilter, Motion compens. deinterlacing, 3D MA deinterlacing, Dynamic contrast enhancement, Progressive scan

## Connectivity

- Video input: DisplayPort (1.2), HDMI (x2), DVI-D, USB
- Video output: DisplayPort, DVI-I, VGA (Analog D-Sub)
- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Audio output: Audio Left/Right (RCA), External speaker connector
- Other connections: mPCIe, micro SD, micro USB, USB power outlet (5 V, 2 amp)
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack

## Supported Display Resolution

### Computer formats

Resolution	Refresh rate
1920 x 1080	60Hz
1440 x 900	60Hz
1366 x 768	60Hz
1360 x 768	60Hz
1280 x 800	60Hz
1280 x 768	60Hz
1024 x 768	60Hz
800 x 600	56, 60, 72, 75Hz
640 x 480	60, 67, 72, 75Hz

### Video formats

Resolution	Refresh rate
1080p	50, 60Hz
1080i	50, 60Hz
720p	50, 60Hz
576i	50Hz
576p	50Hz

480p	60Hz
480i	60Hz

## Dimensions

- Set dimensions in inch (W x H x D): TBD x TBD x 1.79 inch
- Set dimensions (W x H x D): TBD x TBD x 45.5 mm
- Bezel width: 9.7 mm
- Product weight (lb): TBD lb
- Product weight: TBD kg
- VESA Mount: 400 x 400 mm, M6

## Convenience

- Memory: 16GB eMMC
- Placement: Landscape, Portrait
- Tiled Matrix: Up to 10 x 10
- Keyboard control: Hidden, Lockable
- Signal Loop Through: DVI, VGA, RS232, IR Loophrough, DisplayPort
- Network controllable: RJ45, RS232, One Wire (HDMI-CEC), HDMI (One Wire)
- Energy saving functions: Smart Power
- Screen saving functions: Pixel Shift, Low Bright
- Other convenience: Carrying handles

## Power

- Consumption (On mode): TBD
- Standby power consumption: <0.4 W
- Mains power: 100 ~ 240 VAC, 50 ~ 60 Hz

## Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80 %
- Altitude: 0 ~ 3000 m
- MTBF: 60,000 hour(s)

## Sound

- Built-in speakers: 2 x 10W RMS

## Accessories

- Included accessories: Remote Control, Batteries for remote control, User manual on CD-ROM, Quick start guide, RS232 cable, 3D software, AC Power Cord
- Stand: BM04642 or BM02542 (Optional)
- Optional accessories: ColourCalibrationKit (CCK4601)

## Multimedia Applications

- USB Playback Audio: AAC, AIF, AIFF, M4A, MP3, WAV, WMA, ASF, LPCM, M3U, MP4
- USB Playback Picture: BMP, GIF, JPEG, JPG, PDF
- USB Playback Video: M2TS, M4V, MK3D, MKV, MP4, MPEG, MPG, MTS, TS, TTS, VOB, WMV


## Miscellaneous

- On-Screen Display Languages: English, French, German, Spanish, Polish, Turkish, Russian, Italian, Simplified Chinese, Traditional Chinese, Arabic, Japanese
- Regulatory approvals: CE, FCC, Class B, UL/cUL, CCC, C-Tick, RoHS, GOST, BSMI, CB, J-Moss, PSE, VCCI
- Warranty: 3 year warranty

## Internal Player

- CPU: Quad Core Cortex A9 1.8GHz
- GPU: ARM Mali400 Quad Core 533MHz
- Memory: 2GB DDR3
- Storage: 16GB EMMC

Philips 43BDL4050D  
Version: 1.3  
Release Date: 2016/05/16

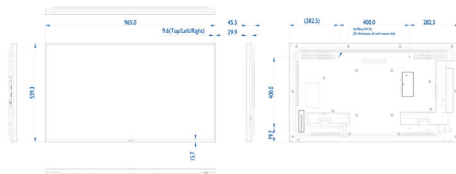

Issue date 2018-02-06

Version: 2.0.1

12 NC: 8670 001 37417  
EAN: 87 12581 73953 9

© 2018 Koninklijke Philips N.V.  
All Rights reserved.

Specifications are subject to change without notice.  
Trademarks are the property of Koninklijke Philips N.V.  
or their respective owners.

[www.philips.com](http://www.philips.com)