



Philips Signage Solutions
Video Wall Display

55"

Direct LED Backlight
Full HD
700 cd/m²

SignageSolutions

BDL5588XH

Go big

Versatile videowall display.

Command attention with an X-Line professional videowall display. Crisp contrast and slim bezels enable clear, distraction-free imaging. Whether you're running an airport or hosting a conference.

Brilliant images. Endless possibilities.

- Full HD monitors. Brilliant images. Clear contrast
- IPS panel: rich colour consistency from every angle
- Ultra-narrow (3.5 mm) bezels. For distraction-free images

Effortless setup. Total control.

- Add Android processing power with an optional CRD50 module
- CMND: Remote system management
- CMND and Control. Operate, monitor, maintain
- CMND and Create. Develop and launch your own content

Powerful system solution

- Tiling mode. Create tiled 4K videowalls of any size
- FailOver. Ensure your display never goes blank
- OPS slot. Embed a full-power PC. No cabling required
- Energy-saving automatic backlight control

Highlights

Tiling mode

Connect two or more Philips professional displays to create a tiled videowall — without the need for external devices. A single player takes care of content, whether you have four screens or 40. 4K content is fully supported and if you're showing that content on four screens you get the best possible dot-by-dot resolution.

Optional CRD50 module

Embed an Android System-on-Chip (SoC) into your Philips Professional Display. The optional CRD50 module is an OPS device that enables Android processing power without the need for cables. Simply slide into the OPS slot, which contains all the connections needed to run the module (including power supply).

CMND

Take control of your Philips Professional Display network. CMND lets you manage, maintain and play via one easy-to-use interface. From installation to daily operation.

CMND and Control




Run your display network over a local (LAN) connection. CMND and Control allows you to perform vital functions like controlling inputs and monitoring display status. Whether you're in charge of one screen or 100.

CMND and Create

Take control of your content with CMND and Create. A drag-and-drop interface makes it simple to publish your own content, whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure that your stills, text and video will be up and running in no time.

OPS slot



Integrate a full-power PC or Android-powered CRD50 module directly into your Philips Professional Display. The OPS slot contains all the connections you need to run your slot-in solution, including a power supply.

SmartCollection

SmartCollection

SmartCollection offers you customisable solutions to meet your specific requirements.

Both integrators and solution providers are offered the latest innovations, while the audience can enjoy impactful solutions. When developing smart innovations we focus on Caring, Innovative and Impactful solutions.

Specifications

Picture/Display

- Diagonal screen size: 54.6 inch / 138.7 cm
- Panel resolution: 1920 x 1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 700 cd/m²
- Response time (typical): 12 ms
- Contrast Ratio: 1700:1
- Dynamic contrast ratio: 500,000:1
- Aspect ratio: 16:9
- Viewing Angle (H / V): 178 / 178 degree
- Pixel pitch: 0.63 x 0.63 mm
- Display colours: 1073 M
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement

Supported Display Resolution

• Computer formats

Resolution	Refresh rate
640 x 480	60, 67, 72, 75 Hz
800 x 600	56, 60, 72, 75 Hz
1024 x 768	60 Hz
1280 x 768	60 Hz
1280 x 800	60 Hz
1280 x 1024	60 Hz
1360 x 768	60 Hz
1366 x 768	60 Hz
1440 x 900	60 Hz
1600 x 1200	60 Hz
1920 x 1080	60 Hz
1920 x 1200	60 Hz

• Video formats

Resolution	Refresh rate
480i	60 Hz
480p	60 Hz
576p	50 Hz
576i	50 Hz
720p	50, 60 Hz
1080i	50, 60 Hz
1080p	50, 60 Hz

Connectivity

- Video input: Component (RCA), Composite (RCA), DVI-D, HDMI (x 2), VGA (Analogue D-Sub), DisplayPort (1.2)
- Video output: DisplayPort, DVI-I, VGA (via DVI-I)
- Audio input: 3.5-mm jack, Audio Left/Right (RCA)
- Audio output: Audio Left/Right (RCA), External speaker connector
- External control: IR (in/out) 3.5 mm jack, RJ45,

- RS232C (in/out) 2.5 mm jack
- Other connections: OPS

Convenience

- Signal Loop Through: RS232, VGA, DisplayPort, DVI, IR Loop through
- Ease of installation: Carrying Handles
- Energy-saving functions: Ambient light sensor, Smart Power
- Network controllable: RS232, RJ45, Card OPS RS232, One Wire (HDMI-CEC)
- Placement: Portrait, Landscape
- Screen-saving functions: Pixel Shift, Low Bright
- Tiled Matrix: Up to 10 x 10

Dimensions

- Bezel thickness: 3.5 mm A-to-A
- Bezel width: Top/Left: 2.3 mm, Bottom/Right: 1.2 mm
- Set dimensions (W x H x D): 1213.4 x 684.2 x 103.35 mm
- Product weight: 29.2 kg
- VESA Mount: 400 x 400 mm

Operating conditions

- Temperature range (operation): 0 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Altitude: 0 ~ 3000 m
- Relative humidity: 20 ~ 80 %
- MTBF: 50,000 hour(s)

Power

- Consumption (On mode): 175 W (EnergyStar 6.0 test method)
- Standby power consumption: <0.5 W

Sound

- Built-in speakers: 2 x 10 W (RMS)

Accessories


- Included accessories: Remote Control, Batteries for remote control, AC Power Cord, VGA cable, RS232 cable, User manual on CD-ROM, Quick start guide, Edge alignment pins, Edge alignment plates
- Optional accessories: Edge finishing kit, ColourCalibrationKit (CCK4602)

Miscellaneous

- On-Screen Display Languages: Arabic, Simplified Chinese, Traditional Chinese, English, French, German, Italian, Japanese, Polish, Russian, Spanish,

Turkish

- Regulatory approvals: CE, UL/cUL, CB, GOST, EPEAT, FCC, Class B
- Warranty: 3-year warranty

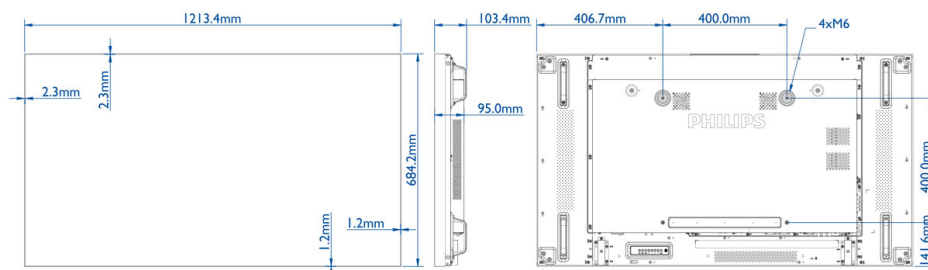

Issue date 2019-07-04

Version: 6.3.1

12 NC: 8670 001 22602
EAN: 87 12581 73049 9

© 2019 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com