DL8740


_ '





>75% recycled paper >75% papier recyclé

© 2015 Koninklijke Philips N.V. All rights reserved xxxx.yyy.zzzz.a (9/2015)

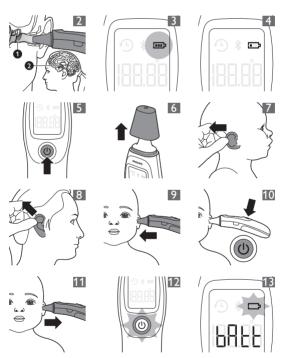

414














ı [—]



-1



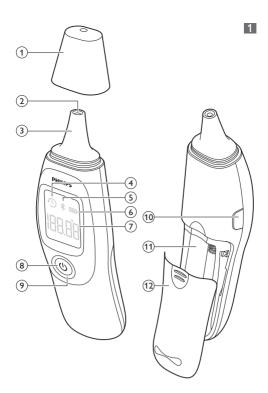

L

Introduction

Congratulations on your purchase and welcome to Philips! To fully benefit from the support that Philips offers, register your product at

www.philips.com/welcome

Intended use

The product is intended for measuring the tempera ture of the human body via the ear canal by an infrared sensor. The device is intended for all ages in a home environment.

General

This Philips ear thermometer has been developed for accurate and fast human body temperature measurements in the ear

Research indicates that the ear is an ideal site for taking the body temperature. The body tempera ture is regulated by the hypothalamus (Fig. 2). The hypothalamus (1) shares the same blood supply as the tympanic membrane (2).

Measurement results can be transmitted via Bluetooth® Smart to the Philips HealthSuite health app for charting and tracking purposes

General description (Fig. 1)

- Protection cap 1
- Infrared sensor 2
- 3 Probe tip

I

- 4 History icon
- 5 Bluetooth® icon
- Battery symbol 6
- 7 Temperature display
- 8 Power button
- Temperature light ring 9 10
- °C/°F selection button Battery compartment
- 11 Battery cover 12

Important safety information

Read this important information carefully before you use the device and save it for future reference. Warning

Í Do not measure the body temperature at the ear site if the ear is inflamed or infected.

- Keep the device out of the reach of children. Children may not be able to use it according to the instructions in this user manual. It is not a toy.
- Do not throw disposable batteries into fire. Bat teries may explode.
- Do not put the device in a wet ear canal after swimming or bathing. This may cause injury to the ear canal.
- Do not use the device if it is broken or dam aged. Using a broken or damaged device may cause injury.

Caution



- _I

- Only use the device as described in this user manual. Do not use it for any other purpose.
- The device is not intended as a substitute for consulting a doctor. Measurement results are for reference only.
- When the device is used to measure the temper ature of a child, it has to be operated by an adult.
- If you clean the ear, wait 5-10 minutes before you use the device.
- Earwax in the ear canal may cause inaccurate measurements. Make sure the ear canal is clean before you use the device.
- Do not take apart, repair or change any part of the device at any time.
- Do not store the device in extreme temperature (below $-20^{\circ}C/-4^{\circ}F$ or over $60^{\circ}C/140^{\circ}F$) or in extreme levels of humidity (below 15%RH or over 85%RH). This may cause inaccurate mea surements.
- Keep the infrared sensor dry, clean and undam aged to ensure accurate measurements.
- Do not touch or blow at the infrared sensor. A polluted infrared sensor may cause inaccurate measurements.
- Never clean the device with an abrasive clean er, thinner, benzene or immerse the device in water or other liquids.

 When the temperature of the storage area dif fers from the temperature of the measuring area, wait at least 30 minutes before you use the device. L

 If you do not intend to use the device for a long period of time, it is advised to remove the batter ies before storing. This is to prevent possible damage due to leakage of the batteries. If the batteries leak, remove them carefully and replace with new batteries.

Compliance with standards

The device meets the relevant standards for this type of Class IIa medical device for home use.
 This Philips device complies with all applicable standards and regulations regarding exposure to electromagnetic fields and complies with EN 60601-1-2

 Display

 Sym bol
 Description
 Explanation

 Image: Symbol
 Description
 Explanation

 Image: Symbol
 History icon
 Display shows last mea surement result when switching on the device.

 Image: Symbol
 Bluetooth® icon
 The device uses Bluetooth® for communi cation.

 Image: Battery symbol
 Battery symbol indicat ing status of battery.

Battery status indications

Battery full

_ |

To indicate that the battery is fully charged the bat tery symbol shows a full battery (Fig. 3).

Battery low To indicate that the battery is low, the battery sym bol shows a nearly empty battery (Fig. 4).

Preparing for use

The batteries (2x 1.5V AAA) are included with the device. Remove the battery strip from the battery compartment before first use.

Pairing the thermometer to your mobile device

Your Philips ear thermometer is equipped with Bluetooth[®] Smart. Download the Philips Health Suite health app from the App Store or Google Play. Use the search term: Philips HealthSuite health app. The Philips health app is available for iOS 8.0+ and Android 4.4+.

- Download the Philips health app on your mobile device, start the Setup wizard and fol low the steps to create a user profile and add the thermometer.
- 2 Make sure the Philips health app is active and Bluetooth on your mobile device is on when pairing is in progress.
- 3 Press the power button once, to switch on the thermometer (Fig. 5).
- The app identifies the thermometer and requests to pair.
- The Bluetooth icon lights up when the ther
- mometer is connected to your mobile device.4 The thermometer switches off automatically
- after 30 seconds of no activity.
- When the thermometer has paired successfully with your mobile device, your personal mea surement results are automatically transmitted to your mobile device via Bluetooth.

Note: Only when the Philips HealthSuite health app is active, your personal health data can be transmitted.

Cleaning the infrared sensor

To achieve accurate measurements, it is important to check if the infrared sensor is clean. Use a cot ton swab to clean the infrared sensor.

See chapter Cleaning and storage for instructions. After cleaning, wait approximately 5–10 minutes before you use the device.

Cleaning the ear

Earwax in the ear canal may cause inaccurate mea surements. Make sure the ear canal is clean before you use the device.

Carefully clean your ear canal. If you clean your ear, wait for 5-10 minutes before you use the device.

Resetting the thermometer

If you press the °C/°F selection button on the side of the thermometer for longer than 10 seconds, all measurements are deleted from the device and all settings return to the factory values.

Measuring temperature

Tips for proper measurement

External factors can influence your body tempera ture. In the following cases, wait at least 30 minutes before taking your temperature:

- When you have been lying on your ear
- When you had your ears covered
- When you have been exposed to very low or very high temperatures
- When you have been swimming or bathing
- If you wear earplugs or hearing aids, remove them first

We do not advise you to use the device in the fol lowing circumstances as this may cause inaccurate measurements:

- When the temperature of the storage area dif fers from the temperature of the measuring area. In this case, wait at least 30 minutes before you use the device.
- If you are using ear drops or other ear medica tion. In this case, measure the temperature in the untreated ear (if any).

Body temperature

- _I

Normal body temperature is a range. A person's normal temperature range tends to decrease with age. The following table shows normal tempera ture ranges by age.

The range of normal body temperature varies from person to person and can be influenced by many factors such as time of day, level of activity and emotions.

Age	Temperature in °Celsius	Temperature in °Fahrenheit
0-2 years	36.4 - 38.0 °C	97.5 - 100.4 °F
3-10 years	36.1 - 37.8 °C	97.0 - 100.0 °F
11-65 years	35.9 - 37.6 °C	96.6 - 99.7 °F
> 65 years	35.8 - 37.5 °C	96.4 - 99.5 °F

I

L

Source: Chamberlain, J.M., et al., Determination of Normal Ear Temperature with an Infrared Emission Detection Thermometer, Annals of Emergency Medicine, January 1995, Vol. 25, pp. 15-20.

Performing a measurement

Note: Before measuring, make sure that the probe tip of the device is clean

- Remove the protection cap before you use the device (Fig. 6).
- Press the power button to switch on the device. 2 The display shows the last measurement result as well as the history icon.
- Hold the outer ear and gently pull it towards the rear of the head to straighten the ear canal. 3
 - Children under the age of 1: hold the outer ear and gently pull it straight back. (Fig. 7) Children aged 1 year or older: hold the outer
 - ear and gently pull the ear up and back (Fig. 8).
- Insert the probe tip very gently and slowly into 4 the ear canal (Fig. 9).
 - Make sure the probe tip points straight towards the eardrum when you hold it.
 - Always insert the probe tip into the same ear, in the same direction and at the same depth
 - Note: A temperature measurement taken in the right ear may differ from a measurement taken in the left ear
- Press the power button to start the measure 5 ment. (Fig. 10)
 - When the measurement is done, you hear 2 beeps
- Remove the probe tip from the ear canal (Fig. 6 11).
 - The display shows the measured tempera ture and the temperature light ring around the power button lights up green or red, depending on the measurement result.

Note: The temperature display on the device shows the measurement result for 30 seconds or until you perform a new measurement

Temperature light ring

This device is equipped with a temperature light ring around the power button (Fig. 12). After the measurement, the ring lights up red or

- green, depending on the measured temperature. When the temperature light ring lights up green, the measured temperature is between 35.5°C
- (95.9°F) and 37.9°C (100.2°F) When the temperature light ring lights up red, the measured temperature is between 38.0°C (100.4°F) and 42.9°C (109.2°F)

Transmit and display personal mea surement results in the app

Note: Your personal measurement data is only stored and displayed in the Philips HealthSuite health app

- Start up the Philips HealthSuite health app and switch on Bluetooth on your mobile device.
- The Bluetooth symbol will light up on the dis 2 play of the thermometer to indicate it is connect ed to your mobile device.
- Once successfully connected, the measurement results will be automatically transmitted to your mobile device via Bluetooth. The Bluetooth sym bol flashes when data is transmitted.
- If the data transmission is successful, the mea surement results are displayed in the Philips health app.
- The time and date of each measurement is shown in the Philips health app.

Removing/inserting batteries

When the batteries are almost empty, the display shows a flashing battery symbol and the text "bAtt" (Fig. 13).

When the battery low symbol appears on the dis play (Fig. 4) or if the device does not function at all, replace the batteries as soon as possible. The device works on 2x 1.5V AAA batteries.

Data will be lost when the batteries are completely empty or are taken out of the thermometer. 1 Slide the battery cover downwards to open the

- battery compartment and remove the empty batteries (Fig. 14).
- 2 Insert two new batteries in the battery compart ment according to the polarity indications marked inside the compartment. Press down the batteries until they click into place (Fig. 15)
- Slide the battery cover back until it locks into 3 place (Fig. 16).

Setting the measurement unit —

You can select either Celsius (°C) or Fahrenheit (°F) for measuring temperature.

Switch on the device.

- _I

Press and hold the °C/°F selection button for 3 2 seconds to change the measurement unit (Fig. 17).

Cleaning and storage

Use a cotton swab to clean the infrared sensor.

- Moisten the cotton swab with a few drops of alcohol and wipe the surface of the infrared sen sor gently with the swab (Fig. 18).
- Immediately wipe the surface dry with a clean 2 cotton swab.
- 3 Use a soft dry cloth to clean the body of the device (Fig. 19).
- 4 Store the device in a clean, dry place at room temperature.

▲ Caution: Do not expose the device to extreme temperatures (below -20°C/-4°F or over 60°C/140°F), extreme levels of humidity (below 15%RH or over 85%RH), direct sunlig or shock. This may result in malfunctions. direct sunlight

Calibration

_ |

The device has been calibrated when it was manu factured.

L

If the device is used according to the instructions, periodic recalibration is not required. If you ques tion the accuracy of the measurement at any time, contact the Consumer Care Centre in your country. Do not attempt to modify or reassemble the device.

Specific	ations	
Power supply	2 x AAA non-rechargeable batter ies	
Temperature measuring range	32.4°C - 42.9°C /90.3°F -109.2°F	
In-ear mea surement accuracy	±0.2°C (±0.4°F) within the range of 32.4°C - 42.9°C (90.3°F - 109.2°F)	
Dimensions	134 (L) x 37 (W) x 27 (D) mm	
Weight	About 54.6g (without battery)	
Operating conditions	10.0°C - 40.0°C (50.0°F - 104.0°F) with a relative humidity of 15% - 85%	
Storage and transport con ditions	-20°C - 60°C (-4°F - 131°F) with a relative humidity of 15% - 85%	
Ordering accessories		

To buy accessories or spare parts, visit www.shop.philips.com/service or go to your Philips dealer. You can also contact the Philips Consumer Care Centre in your country (see the worldwide guarantee leaflet for contact details).

- Recycling
- This symbol means that this product shall not be disposed of with normal household waste (2012/19/EU) (Fig. 20).
- This symbol means that this product contains batteries which shall not be disposed of with normal household waste (2006/66/EC) (Fig. 21)
- Follow your country's rules for the separate col lection of electrical and electronic products and batteries. Correct disposal helps prevent nega tive consequences for the environment and human health.

Removing disposable batteries

To remove disposable batteries, see the instruc tions for placing and/or removing batteries in the user manual.

Guarantee and support

If you need information or support, please visit www.philips.com/support or read the separate worldwide guarantee leaflet.

If you need more information about the app, please visit www.philips.com/healthprograms

Troubleshooting

This chapter summarizes the most common prob lems you could encounter with the appliance. If you are unable to solve the problem with the infor mation below, visit www.philips.com/support for a list of frequently asked questions or contact the Consumer Care Center in your country.

Problem	Possible cause	Solution
The device does not respond or resets auto matically when I pull out the bat tery strip.	The batteries are empty.	Replace the batter ies.
	The poles of the batteries point in the wrong direc tion.	Remove the bat teries and reinsert them properly.
	The batteries are not mak ing proper contact.	Remove the bat teries and reinsert them properly.
	The mea sured temper ature is lower	Follow the instruc tions in the user manual for proper

	than 32.4°C/90.3°F or higher than 42.9°C/109.2° F.	measurement. '
	The device is malfunction ing.	Contact the Philips Consumer Care Center in your country.
	Temperature is out of tem perature mea suring range.	Use the thermome ter in the range of operating condi tions (see 'Specifi cations').
The ther mometer seems to be inaccurate or the measure ment results seem ques tionable.	The infrared sensor is not clean enough.	Clean the infrared sensor with a cot ton swab accord ing to user manu al.
	You are not measuring temperature in the correct way.	Make sure that you have read the user manual and know how to use the device proper ly.

- I

Problem	Possible cause	Solution
	Your room temperature is too low or too high.	Use your ther mometer at room temperatures between 10.0°C and 40.0°C (50.0°F and 104.0°F).
	You are using the device outdoors.	The device is only intended for indoor use.
	You have held the device in your hand too long.	Put the device on the table in the room where the measurement is taking place and let it cool down first.
The battery symbol flash es on the dis play.	The batteries are empty.	Replace the emp ty batteries with new ones.
The display shows ErrO	Self-test error	Remove and replace the batter ies. If the error per sists, contact Philips Consumer Care Center in your country.
The display shows Err2	Stabilization error	Wait 30 minutes and measure again.
The display shows Err3	Battery level low	Replace the emp ty batteries with new ones.

۱_

_ '

Explanation of symbols

The warning signs and symbols are essential to ensure that you use this product safely and correct ly and to protect you and others from injury. Below you find the meaning of the warning signs and sym bols on the label and in the user manual.

i	Symbol for 'follow instructions for use'.
X	This symbol means that the part of the device that comes into physical contact with the user (also known as the applied part) is of type BF (Body Floating) accord ing to IEC 60601-1.
CE ⁰³⁴⁴	Symbol for 'the device complies with Euro pean Medical Device Directive 93/42/EEC requirements'. 0344 refers to the notified body.
X	Symbol for WEEE, waste electrical and electronical equipment. Electrical waste products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice and see chapter 'Battery recycling'.
X	This symbol means that this product con tains batteries which shall not be disposed of with normal household waste (2006/66/EC).
	Indicates the manufacturer, as defined in EU Directives 93/42/EEC.
8 Bluetooth	Symbol for the 'Bluetooth Combination mark'. The device uses Bluetooth for com munication.
SN	Indicates the manufacturer's serial num ber so that a specific medical device can be identified.
	Symbol for indoor use only.
	Indicates caution. The user should consult the instructions for use for important cau tionary information such as warnings and precautions that cannot, for a variety of reasons, be presented on the medical device itself.
IP22	This symbol on the device means: protect ed against access to hazardous parts with a finger and against vertically falling water drops when tilted up to 15 degrees.

 Indicates the storage and transportation temperature limits to which the medical device can be safely exposed: -20°C to 60°C.



X

Symbol for the 2 year Philips guarantee.



-,

The Green Dot ('Der Grüne Punkt' in Ger man) is the license symbol of a European network of industry-funded systems for recycling the packaging materials of con sumer goods.

Electromagnetic emissions and immunity

The device is approved according to EMC safety standard EN 60601-1-2. It is designed to be used in typical domestic environments.

- EMC Guidance
- The ear thermometer needs special precautions regarding EMC and needs to be installed and put into service according to the EMC informa tion provided in this document.
- Wireless communications equipment such as wireless home network devices, mobile phones, cordless telephones and their base stations, walkie-talkies can affect this equipment and should be kept at least a distance d = 3.3 m away from the equipment.

away from the equipment. Note: As indicated in IEC 60601-1-2:2007 for ME equipment, a typical cell phone with a maximum

ı [–]

Guidance and manufacturer's declara tion – electromagnetic emissions - for all ME equipment and ME systems L

Guidance and manufacturer's declaration – electro magnetic emissions

The device is intended for use in the electromag netic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

Emissions test	Compli ance	Electromagnetic environment - guid ance
RF emissions CISPR 11	Group 2	The device must emit electromagnetic ener gy in order to perform its intended function. Nearby electronic equipment may be affected.
RF emissions CISPR 11	Class B	

Harmonic emis sions IEC 61000-3-2	Not applica ble
Voltage fluctua	Not

tions/flicker emissions IEC 61000-3-3

I

Not applica ble

Guidance and manufacturer's declara tion – electromagnetic immunity – for all ME equipment and ME systems

Guidance and manufacturer's declaration – electro magnetic immunity

The device is intended for use in the electromag netic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

lmmuni ty test	IEC 60601 test lev el	Compli ance level	Electromagnetic environment - guidance
Electro static dis charge (ESD) IEC 61000-4 -2	±6 kV contact ±8 kV air	±6 kV contact ±8 kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the rela tive humidity should be at least 30%.
Power frequen cy (50/60H z) mag netic field IEC 61000-4 -8	3A/m	3A/m	Power frequency magnetic fields should be at levels characteristic of a typical location in a typical commer cial or hospital environment.

Guidance and manufacturer's declara tion – electromagnetic immunity –for ME equipment and ME systems that are not life supporting

Guidance and manufacturer's declaration – electro magnetic immunity

The device is intended for use in the electromag netic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

IMMUNI TY test	IEC 606 01 TES T LEV EL	Com pli anc e lev el	Electromagnetic envi ronment - guidance
Conduct ed RF	3 Vrms	3 Vrms	Portable and mobile RF communications
IEC 61000-4- 6	150 kHz to		equipment should be used no closer to any part of the device, including cables, than
	80 MHz		the recommended sep aration distance calcu lated from the equa tion applicable to the frequency of the trans
Radiated RF	3 V/m	3 V/m	mitter. Recommended separa
IEC	80		tion distance:
61000-4- 3	MHz to	d = 1.167 ÖP	
5	.0		

d = 1.167 ÖP 80 MHz to 2.5 GHz

d = 2.333 ÖP 800 MHz to 2.5 GHz

where P is the maxi mum output power rat ing of the transmitter in watts (W) according to the transmitter manu facturer and d is the recommended separa tion distance in metres (m).

Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey (a), should be less than the compli ance level in each fre quency range (b).

Interference may occur in the vicinity of equip ment marked with the following symbol:

1



NOTE 1 At 80 MHz and 800 MHz, the higher fre quency range applies. NOTE 2 These guidelines may not apply in all situa

- _I

NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by

2.5 GHz

L

(a) Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) tele phones and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the device is used exceeds the applicable RF compliance level above, the device should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as re-orienting or relocating the device.

(b) Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 3V/m.

Recommended separation distances between portable and mobile RF com munications equipment and the ME equipment or ME system – for ME equipment and ME systems that are not life supporting

Recommended separation distances between portable and mobile RF communications equip ment and the device.

The device is intended for use in an electromagnet ic environment in which radiated RF disturbances are controlled. The customer or the user of the device can help prevent electromagnetic interfer ence by maintaining a minimum distance between portable and mobile RF communications equip ment (transmitters) and the device as recommend ed below, according to the maximum output pow er of the communications equipment.

Separation distance according to frequency of transmitter (m)

Rated max imum out put power	150 kHz to 80 MHz	80 MHz to 800 MHz	800 MHz to 2.5 GHz
of transmit ter (W)		d = 1.167 Ö	d = 1.167 Ö P
	d = 1.167 Ö P	Ρ	
0.01	0.117	0.117	0.233
0.1	0.369	0.369	0.738
1	1.167	1.167	2.333
10	3.690	3.690	7.378
100	11.67	11.67	23.33

For transmitters rated at a maximum output power not listed above, the recommended separation dis tance d in metres (m) can be estimated using the equation applicable to the frequency of the trans mitter, where P is the maximum output power rat ing of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE 1 At 80MHz and 800MHz, the separation dis tance for the higher frequency range applies. NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

Nederlands

Introduction

Congratulations on your purchase and welcome to Philips! To fully benefit from the support that Phi lips offers, register your product at www.phi lips.com/welcome.

Intended use

The product is intended for measuring the tempera ture of the human body via the ear canal by an infrared sensor. The device is intended for all ages in a home environment.

General

This Philips ear thermometer has been developed for accurate and fast human body temperature measurements in the ear.

Research indicates that the ear is an ideal site for taking the body temperature. The body temperatu re is regulated by the hypothalamus (Fig. 2). The hypothalamus (1) shares the same blood supply as the tympanic membrane (2).

Measurement results can be transmitted via Bluetooth® Smart to the Philips HealthSuite health app for charting and tracking purposes.

General description (Fig. 1)

- 1 Protection cap
- 2 Infrared sensor
- 3 Probe tip
- 4 History icon
- 5 Bluetooth® icon
- 6 Battery symbol
- 7 Temperature display
- 8 Power button
- 9 Temperature light ring
- 10 °C/°F selection button
- 11 Battery compartment
- 12 Battery cover

Important safety information

Read this important information carefully before you use the device and save it for future reference.

Warning



- _I

- Do not measure the body temperature at the ear site if the ear is inflamed or infected.
- Keep the device out of the reach of children. Children may not be able to use it according to the instructions in this user manual. It is not a toy.
- Do not throw disposable batteries into fire. Bat teries may explode.

Do not put the device in a wet ear canal after swimming or bathing. This may cause injury to the ear canal.

L

Do not use the device if it is broken or dama ged. Using a broken or damaged device may cause injury.

Caution

Ĩ

I

- Only use the device as described in this user manual. Do not use it for any other purpose.
- The device is not intended as a substitute for consulting a doctor. Measurement results are for reference only
- When the device is used to measure the tempe rature of a child, it has to be operated by an adult.
- If you clean the ear, wait 5-10 minutes before you use the device.
- Earwax in the ear canal may cause inaccurate measurements. Make sure the ear canal is clean before you use the device.
- Do not take apart, repair or change any part of the device at any time.
- Do not store the device in extreme temperature (below -20°C/-4°F or over 60°C/140°F) or in extreme levels of humidity (below 15%RH or over 85%RH). This may cause inaccurate mea surements.
- Keep the infrared sensor dry, clean and unda maged to ensure accurate measurements
- Do not touch or blow at the infrared sensor. A polluted infrared sensor may cause inaccurate measurements.
- Never clean the device with an abrasive clea ner, thinner, benzene or immerse the device in water or other liquids.
- When the temperature of the storage area dif fers from the temperature of the measuring area, wait at least 30 minutes before you use the device
- If you do not intend to use the device for a long period of time, it is advised to remove the batter ries before storing. This is to prevent possible damage due to leakage of the batteries. If the batteries leak, remove them carefully and repla ce with new batteries.

Compliance with standards

- The device meets the relevant standards for this type of Class IIa medical device for home use
- This Philips device complies with all applicable standards and regulations regarding exposure to electromagnetic fields and complies with EN 60601-1-2

Display

Sym bol	Description	Explanation
	History icon	Display shows last mea surement result when switching on the device.
*	Bluetooth® icon	The device uses Bluetooth® for communi cation.
	Battery sym bol	Battery symbol indica ting status of battery.

Battery status indications

Battery full

To indicate that the battery is fully charged the bat tery symbol shows a full battery (Fig. 3). Battery low

To indicate that the battery is low, the battery sym bol shows a nearly empty battery (Fig. 4).

Preparing for use

The batteries (2x 1.5V AAA) are included with the device. Remove the battery strip from the battery compartment before first use

Pairing the thermometer to your mobi le device

Your Philips ear thermometer is equipped with Bluetooth® Smart. Download the Philips HealthSui te health app from the App Store or Google Play. Use the search term: Philips HealthSuite health app. The Philips health app is available for iOS 8.0+ and Android 4.4+

- Download the Philips health app on your mobi le device, start the Setup wizard and follow the steps to create a user profile and add the ther mometer
- Make sure
- nilips the 1 app acti Bluetooth on your mobile device is on when pai ring is in progress.
- Press the power button once, to switch on the 3 thermometer (Fig. 5).
- The app identifies the thermometer and requests to pair.
- The Bluetooth icon lights up when the thermo meter is connected to your mobile device
- 4 The thermometer switches off automatically after 30 seconds of no activity.
- When the thermometer has paired successfully with your mobile device, your personal mea surement results are automatically transmitted to your mobile device via Bluetooth.

Note: Only when the Philips HealthSuite health app is active, your personal health data can be transmitted.

Cleaning the infrared sensor

To achieve accurate measurements, it is important to check if the infrared sensor is clean. Use a cot ton swab to clean the infrared sensor.

See chapter Cleaning and storage for instructions. After cleaning, wait approximately 5-10 minutes before you use the device.

Cleaning the ear

-I

Earwax in the ear canal may cause inaccurate mea surements. Make sure the ear canal is clean before you use the device

Carefully clean your ear canal. If you clean your ear, wait for 5-10 minutes before you use the devi ce.

ı —

Resetting the thermometer

_ I

If you press the °C/°F selection button on the side of the thermometer for longer than 10 seconds, all measurements are deleted from the device and all settings return to the factory values.

L

Measuring temperature

Tips for proper measurement

External factors can influence your body tempera ture. In the following cases, wait at least 30 minu tes before taking your temperature:

- When you have been lying on your ear
- When you had your ears covered When you have been exposed to very low or very high temperatures
- When you have been swimming or bathing If you wear earplugs or hearing aids, remove them first

We do not advise you to use the device in the follo wing circumstances as this may cause inaccurate measurements:

- When the temperature of the storage area dif fers from the temperature of the measuring area. In this case, wait at least 30 minutes befo re you use the device.
- If you are using ear drops or other ear medicati on. In this case, measure the temperature in the untreated ear (if any).

Body temperature

Normal body temperature is a range. A person's normal temperature range tends to decrease with age. The following table shows normal temperatu

re ranges by age. The range of normal body temperature varies from person to person and can be influenced by many factors such as time of day, level of activity and emotions

citionis.		
Age	Temperature in °Celsius	Temperature in °Fahrenheit
0-2 years	36.4 - 38.0 °C	97.5 - 100.4 °F
3-10 years	36.1 - 37.8 °C	97.0 - 100.0 °F
11-65 years	35.9 - 37.6 °C	96.6 - 99.7 °F
> 65 years	35.8 - 37.5 °C	96.4 - 99.5 °F

Source: Chamberlain, J.M., et al., Determination of Normal Ear Temperature with an Infrared Emission Detection Thermometer, Annals of Emergency Medicine, January 1995, Vol. 25, pp. 15–20.

Performing a measurement

Note: Before measuring, make sure that the probe tip of the device is clean

- Remove the protection cap before you use the device (Fig. 6).
- Press the power button to switch on the device. 2 The display shows the last measurement result as well as the history icon.
- Hold the outer ear and gently pull it towards the rear of the head to straighten the ear canal. 3
 - Children under the age of 1: hold the outer ear and gently pull it straight back. (Fig. 7) Children aged 1 year or older: hold the outer
 - ear and gently pull the ear up and back (Fig. 8).
- 4 Insert the probe tip very gently and slowly into the ear canal (Fig. 9).
 - Make sure the probe tip points straight towards the eardrum when you hold it.
 - Always insert the probe tip into the same ear, in the same direction and at the same depth.
 - Note: A temperature measurement taken in the right ear may differ from a measurement taken in the left ear
- Press the power button to start the measure 5 ment. (Fig. 10)
 - When the measurement is done, you hear 2 beeps.
- 6 Remove the probe tip from the ear canal (Fig. 11).
 - The display shows the measured temperatu re and the temperature light ring around the power button lights up green or red, depen ding on the measurement result.

Note: The temperature display on the device shows the measurement result for 30 seconds or until you perform a new measurement.

Temperature light ring

This device is equipped with a temperature light ring around the power button (Fig. 12). After the measurement, the ring lights up red or n, depending on the measured temp greer

- When the temperature light ring lights up green, the measured temperature is between 35.5°C (95.9°F) and 37.9°C (100.2°F)
- When the temperature light ring lights up red, the measured temperature is between 38.0°C (100.4°F) and 42.9°C (109.2°F)

Transmit and display personal mea surement results in the app

Note: Your personal measurement data is only sto red and displayed in the Philips HealthSuite health app

- Start up the Philips HealthSuite health app and switch on Bluetooth on your mobile device
- The Bluetooth symbol will light up on the dis 2 play of the thermometer to indicate it is connect ted to your mobile device.
- Once successfully connected, the measurement results will be automatically transmitted to your mobile device via Bluetooth. The Bluetooth sym bol flashes when data is transmitted.
- If the data transmission is successful, the mea surement results are displayed in the Philips health app.
- The time and date of each measurement is shown in the Philips health app.

Removing/inserting batteries

-I

When the batteries are almost empty, the display shows a flashing battery symbol and the text "bAtt' (Fig. 13).

When the battery low symbol appears on the dis play (Fig. 4) or if the device does not function at all,

, -

replace the batteries as soon as possible. The devi ce works on 2x 1.5V AAA batteries

Data will be lost when the batteries are completely empty or are taken out of the thermometer. 1 Slide the battery cover downwards to open the

- battery compartment and remove the empty batteries (Fig. 14).
- Insert two new batteries in the battery compart 2 ment according to the polarity indications mar ked inside the compartment. Press down the batteries until they click into place (Fig. 15).
- 3 Slide the battery cover back until it locks into place (Fig. 16).

Setting the measurement unit

You can select either Celsius (°C) or Fahrenheit (°F) for measuring temperature.

Switch on the device

Press and hold the °C/°F selection button for 3 2 seconds to change the measurement unit (Fig. 17).

Cleaning and storage

Use a cotton swab to clean the infrared sensor.

- Moisten the cotton swab with a few drops of alcohol and wipe the surface of the infrared sen 1 sor gently with the swab (Fig. 18).
- 2 Immediately wipe the surface dry with a clean cotton swab.
- 3 Use a soft dry cloth to clean the body of the device (Fig. 19).
- Store the device in a clean, dry place at room 4 temperature. \bigwedge Caution: Do not expose the device to extre

me temperatures (below -20°C/-4°F or over 60°C/140°F), extreme levels of humidity (below 15%RH or over 85%RH), direct sunlight or shock. This may result in malfunctions.

Calibration

Specifications =

The device has been calibrated when it was manu factured.

If the device is used according to the instructions, periodic recalibration is not required. If you questi on the accuracy of the measurement at any time, contact the Consumer Care Centre in your country. Do not attempt to modify or reassemble the devi ce

Power supply	2 x AAA non-rechargeable batte ries
Temperature measuring range	32.4°C − 42.9°C /90.3°F −109.2°F
In-ear mea surement accuracy	±0.2°C (±0.4°F) within the range of 32.4°C - 42.9°C (90.3°F - 109.2°F)
Dimensions	134 (L) x 37 (W) x 27 (D) mm
Weight	About 54.6g (without battery)
Operating conditions	10.0°C - 40.0°C (50.0°F - 104.0°F) with a relative humidity of 15% - 85%
Storage and transport con ditions	-20°C - 60°C (-4°F - 131°F) with a relative humidity of 15% - 85%

Ordering accessories

To buy accessories or spare parts, visit www.shop.philips.com/service or go to your Philips dealer. You can also contact the Philips Consumer Care Centre in your country (see the worldwide guarantee leaflet for contact details).

Recyclen

- _I

- Dit symbool betekent dat dit product niet samen met het gewone huishoudelijke afval mag worden weggegooid (2012/19/EU) (Fig. 20).
- This symbol means that this product contains batteries which shall not be disposed of with normal household waste (2006/66/EC) (Fig. 21)
- Follow your country's rules for the separate col lection of electrical and electronic products and batteries. Correct disposal helps prevent negati ve consequences for the environment and human health.

Removing disposable batteries

To remove disposable batteries, see the instructi ons for placing and/or removing batteries in the manual.

Guarantee and support

If you need information or support, please visit www.philips.com/support or read the separate worldwide guarantee leaflet.

If you need more information about the app, plea se visit www.philips.com/healthprograms

Troubleshooting

This chapter summarizes the most common pro blems you could encounter with the appliance. If you are unable to solve the problem with the infor mation below, visit www.philips.com/support for a list of frequently asked questions or contact the Consumer Care Center in your country.

Problem	Possible cau se	Solution
The device does not res pond or resets auto matically when I pull out the bat tery strip.	The batteries are empty.	Replace the batte ries.
	The poles of the batteries point in the wrong directi on.	Remove the batte ries and reinsert them properly.

Problem	Possible cau se	Solution
	The batteries are not making pro per contact.	Remove the batte ries and reinsert them properly.
	The measu red tempera ture is lower than 32.4°C/90.3°F or higher than 42.9°C/109.2° F.	Follow the instruc tions in the user manual for proper measurement.
	The device is malfunctio ning.	Contact the Phi lips Consumer Care Center in your country.
	Temperature is out of tem perature mea suring range.	Use the thermome ter in the range of operating conditi ons (see 'Specifica tions').
The thermo meter seems to be inaccu rate or the measurement results seem questionable.	The infrared sensor is not clean enough.	Clean the infrared sensor with a cot ton swab accor ding to user manu al.
	You are not measuring temperature in the correct way.	Make sure that you have read the user manual and know how to use the device proper ly.
	Your room temperature is too low or too high.	Use your thermo meter at room temperatures bet ween 10.0°C and 40.0°C (50.0°F and 104.0°F).
	You are using the device outdoors.	The device is only intended for indoor use.
	You have held the devi ce in your hand too long.	Put the device on the table in the room where the measurement is taking place and let it cool down first.
The battery symbol flas hes on the display.	The batteries are empty.	Replace the emp ty batteries with new ones.
The display shows ErrO	Self-test error	Remove and repla ce the batteries. If the error persists, contact Philips Consumer Care Center in your country.
The display shows Err2	Stabilization error	Wait 30 minutes and measure again.
The display shows Err3	Battery level low	Replace the emp ty batteries with new ones.

١.

_ '

Explanation of symbols

The warning signs and symbols are essential to ensure that you use this product safely and correct ly and to protect you and others from injury. Below you find the meaning of the warning signs and sym bols on the label and in the user manual.

ty batteries with new ones.

i	Symbol for 'follow instructions for use'.
X	This symbol means that the part of the device that comes into physical contact with the user (also known as the applied part) is of type BF (Body Floating) accor ding to IEC 60601-1.
CE ⁰³⁴⁴	Symbol for 'the device complies with Euro pean Medical Device Directive 93/42/EEC requirements'. 0344 refers to the notified body.



Symbol for WEEE, waste electrical and electronical equipment. Electrical waste products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local autho rity or retailer for recycling advice and see chapter 'Battery recycling'.



This symbol means that this product con tains batteries which shall not be disposed of with normal household waste (2006/66/EC).



Indicates the manufacturer, as defined in EU Directives 93/42/EEC.

Symbol for the 'Bluetooth Combination mark'. The device uses Bluetooth for com uetooth munication.



Indicates the manufacturer's serial num ber so that a specific medical device can be identified.



Symbol for indoor use only.



- _I

Indicates caution. The user should consult the instructions for use for important cauti onary information such as warnings and precautions that cannot, for a variety of reasons, be presented on the medical device itself.

ı [–]

This symbol on the device means: protec ted against access to hazardous parts with a finger and against vertically falling water drops when tilted up to 15 degrees. IP22

L

I

Indicates the storage and transportation temperature limits to which the medical device can be safely exposed: -20°C to 60°C.



Symbol for the 2 year Philips guarantee.

The Green Dot ('Der Grüne Punkt' in Ger man) is the license symbol of a European network of industry-funded systems for recycling the packaging materials of consu mer goods.

Electromagnetic emissions and immunity

The device is approved according to EMC safety standard EN 60601-1-2. It is designed to be used in typical domestic environments.

EMC Guidance

- The ear thermometer needs special precautions regarding EMC and needs to be installed and put into service according to the EMC informati on provided in this document.
- Wireless communications equipment such as wireless home network devices, mobile phones cordless telephones and their base stations, wal kie-talkies can affect this equipment and should be kept at least a distance d = 3.3 m

away from the equipment. Note: As indicated in IEC 60601-1-2:2007 for ME equipment, a typical cell phone with a maximum output power of 2 W yields d = 3.3 m at an immunity level of 3V/m

Guidance and manufacturer's declara tion – electromagnetic emissions - for all ME equipment and ME systems

Guidance and manufacturer's declaration -- electro magnetic emissions

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

Emissions test	Compli ance	Electromagnetic environment - guid ance
RF emissions CISPR 11	Group 2	The device must emit electromagnetic ener gy in order to perform its intended function. Nearby electronic equipment may be affected.
RF emissions CISPR 11	Class B	

Harmonic emis Not sions IEC app applica 61000-3-2 ble

Voltage fluctuati Not ons/flicker emis app sions IEC ble ble 61000-3-3

applica

Guidance and manufacturer's declara tion – electromagnetic immunity – for all ME equipment and ME systems

Guidance and manufacturer's declaration - electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

Immuni ty test	IEC 60601 test level	Compli ance level	Electromagnetic environment - guidance
Electro static dischar ge (ESD) IEC 61000-4 -2	±6 kV contact ±8 kV air	±6 kV contact ±8 kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the relati ve humidity should be at least 30%.
Power frequen cy (50/60H	3A/m	3A/m	Power frequency magnetic fields should be at levels characteristic of a

```
z) mag
netic
field IEC
61000-4
-8
```

- I

typical location in typical commerci al or hospital envi ronment

1

Guidance and manufacturer's declara tion – electromagnetic immunity –for ME equipment and ME systems that are not life supporting

Guidance and manufacturer's declaration - electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

	Electromagnetic envi ronment - guidance
--	--

Conduc ted RF IEC 61000-4- 6	3 Vrms 150 kHz to 80 MHz	3 Vrms	Portable and mobile RF communications equipment should be used no closer to any part of the device, including cables, than the recommended separation distance cal culated from the equa tion applicable to the frequency of the trans
Radiated RF IEC 61000-4- 3	3 V/m 80 MHz to 2.5 GHz	3 V/m	mitter. Recommended separa tion distance: d = 1.167 ÖP d = 1.167 ÖP 80 MHz to 2.5 GHz d = 2.333 ÖP 800 MHz to 2.5 GHz where P is the maxi mum output power rating of the transmitter in watts (W) accor ding to the transmitter manufacturer and d is the recommended separation distance in metres (m). Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey (a), should be less than the complian ce level in each fre quency range (b).

I

Interference may occur in the vicinity of equip ment marked with the following symbol: L



NOTE 1 At 80 MHz and 800 MHz, the higher fre quency range applies.

NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

(a) Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) telepho nes and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the device is used exceeds the applicable RF compliance level above, the device should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as re-orienting or relocating the device.

(b) Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 3V/m.

Recommended separation distances between portable and mobile RF com munications equipment and the ME equipment or ME system – for ME equipment and ME systems that are not life supporting

Recommended separation distances between por table and mobile RF communications equipment and the device.

The device is intended for use in an electromagne tic environment in which radiated RF disturbances are controlled. The customer or the user of the devi ce can help prevent electromagnetic interference by maintaining a minimum distance between porta ble and mobile RF communications equipment (transmittlers) and the device as recommended below, according to the maximum output power of the communications equipment.

Separation distance according to frequency of transmitter (m)

Rated maximum output	150 kHz to 80 MHz	80 MHz to 800 MHz	800 MHz to 2.5 GHz
power of transmitter (W)	d = 1.167 Ö P	d = 1.167 Ö P	d = 1.167 Ö P
0.01	0.117	O.117	0.233

0.1	0.369	0.369	0.738
1	1.167	1.167	2.333
10	3.690	3.690	7.378
100	11.67	11.67	23.33

For transmitters rated at a maximum output power not listed above, the recommended separation dis tance d in metres (m) can be estimated using the equation applicable to the frequency of the trans mitter, where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE 1 At 80MHz and 800MHz, the separation dis tance for the higher frequency range applies. NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

Français

- _I

Introduction

Félicitations pour votre achat et bienvenue dans l'univers Philips ! Pour profiter pleinement de l'as sistance offerte par Philips, enregistrez votre pro duit à l'adresse suivante : www.philips.com/wel come.

Intended use

The product is intended for measuring the tempera ture of the human body via the ear canal by an in frared sensor. The device is intended for all ages in a home environment.

L

General

I

This Philips ear thermometer has been developed for accurate and fast human body temperature measurements in the ear.

Research indicates that the ear is an ideal site for taking the body temperature. The body tempera ture is regulated by the hypothalamus (Fig. 2). The hypothalamus (1) shares the same blood supply as the tympanic membrane (2).

Measurement results can be transmitted via Bluetooth® Smart to the Philips HealthSuite health app for charting and tracking purposes.

General description (Fig. 1)

- Protection cap 1
- 2 Infrared sensor
- 3 Probe tip
- 4 History icon
- 5 Bluetooth® icon
- 6 Battery symbol 7 Temperature display
- 8 Power button
- 9
- Temperature light ring 10 °C/°F selection button
- 11 Battery compartment
- 12 Battery cover

Important safety information

Read this important information carefully before you use the device and save it for future reference.

Warning

Do not measure the body temperature at the ear site if the ear is inflamed or infected.

- Keep the device out of the reach of children. Children may not be able to use it according to the instructions in this user manual. It is not a toy.
- Do not throw disposable batteries into fire. Bat teries may explode
- Do not put the device in a wet ear canal after swimming or bathing. This may cause injury to the ear canal.
- Do not use the device if it is broken or dama ged. Using a broken or damaged device may cause injury.

Caution

Í

Only use the device as described in this user ma nual. Do not use it for any other purpose. The device is not intended as a substitute for

- consulting a doctor. Measurement results are for reference only
- When the device is used to measure the tempe rature of a child, it has to be operated by an adult.
- If you clean the ear, wait 5-10 minutes before you use the device.
- Earwax in the ear canal may cause inaccurate measurements. Make sure the ear canal is clean before you use the device.
- Do not take apart, repair or change any part of the device at any time.
- Do not store the device in extreme temperature (below -20°C/-4°F or over 60°C/140°F) or in extreme levels of humidity (below 15%RH or over 85%RH). This may cause inaccurate measure ments
- Keep the infrared sensor dry, clean and unda maged to ensure accurate measurements
- Do not touch or blow at the infrared sensor. A polluted infrared sensor may cause inaccurate measurements.
- Never clean the device with an abrasive clea ner, thinner, benzene or immerse the device in water or other liquids.
- When the temperature of the storage area dif fers from the temperature of the measuring area, wait at least 30 minutes before you use the device.
- If you do not intend to use the device for a long period of time, it is advised to remove the batte ries before storing. This is to prevent possible da mage due to leakage of the batteries. If the bat teries leak, remove them carefully and replace with new batteries

Compliance with standards

- The device meets the relevant standards for this type of Class IIa medical device for home use
- This Philips device complies with all applicable standards and regulations regarding exposure to electromagnetic fields and complies with EN 60601-1-2

Display

Sym bol	Description	Explanation
Ŀ	History icon	Display shows last mea surement result when switching on the device.
*	Bluetooth® icon	The device uses Bluetooth® for communi cation.
	Battery sym bol	Battery symbol indica ting status of battery.

Battery status indications

Battery full

To indicate that the battery is fully charged the bat tery symbol shows a full battery (Fig. 3).

Battery low

- _I

To indicate that the battery is low, the battery sym bol shows a nearly empty battery (Fig. 4).

The batteries (2x 1.5V AAA) are included with the device. Remove the battery strip from the battery compartment before first use.

L

Pairing the thermometer to your mo bile device

Your Philips ear thermometer is equipped with Bluetooth[®] Smart. Download the Philips Health Suite health app from the App Store or Google Play. Use the search term: Philips HealthSuite health app. The Philips health app is available for iOS 8.0+ and Android 4.4+.

- 1 Download the Philips health app on your mo bile device, start the Setup wizard and follow the steps to create a user profile and add the thermometer.
- 2 Make sure the Philips health app is active and Bluetooth on your mobile device is on when pai ring is in progress.
- 3 Press the power button once, to switch on the thermometer (Fig. 5).
- The app identifies the thermometer and re quests to pair.
- The Bluetooth icon lights up when the thermo
- meter is connected to your mobile device. 4 The thermometer switches off automatically af
- ter 30 seconds of no activity.
 When the thermometer has paired successfully with your mobile device, your personal measu rement results are automatically transmitted to your mobile device via Plustoeth

your mobile device via Bluetooth. Note: Only when the Philips HealthSuite health app is active, your personal health data can be transmitted.

Cleaning the infrared sensor

To achieve accurate measurements, it is important to check if the infrared sensor is clean. Use a cot ton swab to clean the infrared sensor.

See chapter Cleaning and storage for instructions. After cleaning, wait approximately 5-10 minutes be fore you use the device.

Cleaning the ear

Earwax in the ear canal may cause inaccurate mea surements. Make sure the ear canal is clean before you use the device.

Carefully clean your ear canal. If you clean your ear, wait for 5-10 minutes before you use the de vice.

Resetting the thermometer

If you press the °C/°F selection button on the side of the thermometer for longer than 10 seconds, all measurements are deleted from the device and all settings return to the factory values.

Measuring temperature

Tips for proper measurement

External factors can influence your body tempera ture. In the following cases, wait at least 30 mi nutes before taking your temperature:

- When you have been lying on your ear
- When you had your ears covered
- When you have been exposed to very low or ve ry high temperatures
- When you have been swimming or bathing
- If you wear earplugs or hearing aids, remove them first

We do not advise you to use the device in the follo wing circumstances as this may cause inaccurate measurements:

- When the temperature of the storage area dif fers from the temperature of the measuring area. In this case, wait at least 30 minutes be fore you use the device.
- If you are using ear drops or other ear medica tion. In this case, measure the temperature in the untreated ear (if any).

Body temperature

Normal body temperature is a range. A person's normal temperature range tends to decrease with age. The following table shows normal tempera ture ranges by age.

The range of normal body temperature varies from person to person and can be influenced by many factors such as time of day, level of activity and emotions.

ernotions.			
Age	Temperature in °Celsius	Temperature in °Fahrenheit	
0-2 years	36.4 - 38.0 °C	97.5 - 100.4 °F	
3-10 years	36.1 - 37.8 °C	97.0 - 100.0 °F	
11-65 years	35.9 - 37.6 °C	96.6 - 99.7 °F	

> 65 years 35.8 - 37.5 °C 96.4 - 99.5 °F

Source: Chamberlain, J.M., et al., Determination of Normal Ear Temperature with an Infrared Emission Detection Thermometer, Annals of Emergency Me dicine, January 1995, Vol. 25, pp. 15-20.

Performing a measurement

Note: Before measuring, make sure that the probe tip of the device is clean.

- 1 Remove the protection cap before you use the device (Fig. 6).
- 2 Press the power button to switch on the device.
 - The display shows the last measurement re sult as well as the history icon.
- 3 Hold the outer ear and gently pull it towards the rear of the head to straighten the ear canal.
 - Children under the age of 1: hold the outer ear and gently pull it straight back. (Fig. 7)
 Children aged 1 year or older: hold the outer
 - Children aged 1 year or older: hold the outer ear and gently pull the ear up and back (Fig. 8).
- 4 Insert the probe tip very gently and slowly into the ear canal (Fig. 9).
 - Make sure the probe tip points straight to wards the eardrum when you hold it.
 - Always insert the probe tip into the same ear, in the same direction and at the same depth.

Note: A temperature measurement taken in the right ear may differ from a measurement taken in the left ear.

ı [—]

5 Press the power button to start the measure ment. (Fig. 10)

-I

When the measurement is done, you hear 2 beeps.

L

- Remove the probe tip from the ear canal (Fig. 6 11).
 - The display shows the measured tempera ture and the temperature light ring around the power button lights up green or red, de pending on the measurement result.

Note: The temperature display on the device shows the measurement result for 30 seconds or until you perform a new measurement.

Temperature light ring

_ |

This device is equipped with a temperature light ring around the power button (Fig. 12). After the measurement, the ring lights up red or

- green, depending on the measured temperature. When the temperature light ring lights up green, the measured temperature is between 35.5°C (95.9°F) and 37.9°C (100.2°F)
- When the temperature light ring lights up red, the measured temperature is between 38.0°C (100.4°F) and 42.9°C (109.2°F)

Transmit and display personal measu rement results in the app

Note: Your personal measurement data is only sto red and displayed in the Philips HealthSuite health app

- Start up the Philips HealthSuite health app and switch on Bluetooth on your mobile device
- The Bluetooth symbol will light up on the dis 2 play of the thermometer to indicate it is connec ted to your mobile device.
- Once successfully connected, the measurement results will be automatically transmitted to your mobile device via Bluetooth. The Bluetooth sym bol flashes when data is transmitted.
- If the data transmission is successful, the measu rement results are displayed in the Philips health app.
- The time and date of each measurement is shown in the Philips health app

Removing/inserting batteries

When the batteries are almost empty, the display shows a flashing battery symbol and the text "bAtt" (Fig. 13).

When the battery low symbol appears on the dis play (Fig. 4) or if the device does not function at all, replace the batteries as soon as possible. The de vice works on 2x 1.5V AAA batteries.

Data will be lost when the batteries are completely

- empty or are taken out of the thermometer. 1 Slide the battery cover downwards to open the battery compartment and remove the empty batteries (Fig. 14).
- 2 Insert two new batteries in the battery compart ment according to the polarity indications mar ked inside the compartment. Press down the batteries until they click into place (Fig. 15).
- Slide the battery cover back until it locks into 3 place (Fig. 16).

Setting the measurement unit —

You can select either Celsius (°C) or Fahrenheit (°F) for measuring temperature.

- Switch on the device.
- Press and hold the °C/°F selection button for 3 2 seconds to change the measurement unit (Fig. 17)

Cleaning and storage

Use a cotton swab to clean the infrared sensor Moisten the cotton swab with a few drops of al cohol and wipe the surface of the infrared sen

- sor gently with the swab (Fig. 18).
- 2 Immediately wipe the surface dry with a clean cotton swab.
- 3 Use a soft dry cloth to clean the body of the de vice (Fig. 19).
- Store the device in a clean, dry place at room 4

temperature. A Caution: Do not expose the device to ex treme temperatures (below -20°C/-4°F or over 60°C/140°F), extreme levels of humidity (below 15%RH or over 85%RH), direct sunlight or shock. This may result in malfunctions.

Calibration

The device has been calibrated when it was manu factured.

If the device is used according to the instructions, periodic recalibration is not required. If you ques tion the accuracy of the measurement at any time, contact the Consumer Care Centre in your country. Do not attempt to modify or reassemble the de vice

Power supply	2 x AAA non-rechargeable batte ries		
Temperature measuring range	32.4°C - 42.9°C /90.3°F -109.2°F		
In-ear measu rement accu racy	±0.2°C (±0.4°F) within the range of 32.4°C - 42.9°C (90.3°F - 109.2°F)		
Dimensions	134 (L) x 37 (W) x 27 (D) mm		
Weight	About 54.6g (without battery)		
Operating conditions	10.0°C - 40.0°C (50.0°F - 104.0°F) with a relative humidity of 15% - 85%		
Storage and transport conditions	-20°C - 60°C (-4°F - 131°F) with a relative humidity of 15% - 85%		

Ordering accessories

-

To buy accessories or spare parts, visit www.shop.philips.com/service or go to your Philips dealer. You can also contact the Philips Consumer Care Centre in your country (see the worldwide guarantee leaflet for contact details).

ı [—]

Recyclage

_ |

Ce symbole signifie que ce produit ne doit pas être mis au rebut avec les ordures ménagères (2012/19/EU) (Fig. 20).

L

- This symbol means that this product contains batteries which shall not be disposed of with normal household waste (2006/66/EC) (Fig. 21)
- Follow your country's rules for the separate col lection of electrical and electronic products and batteries. Correct disposal helps prevent nega tive consequences for the environment and hu man health.

Removing disposable batteries

To remove disposable batteries, see the instruc tions for placing and/or removing batteries in the user manual.

Guarantee and support

If you need information or support, please visit www.philips.com/support or read the separate worldwide guarantee leaflet.

If you need more information about the app, please visit www.philips.com/healthprograms I

Troubleshooting

This chapter summarizes the most common pro blems you could encounter with the appliance. If you are unable to solve the problem with the infor mation below, visit www.philips.com/support for a list of frequently asked questions or contact the Consumer Care Center in your country.

Consumer Care		
Problem	Possible cause	Solution
The device does not re spond or re sets automati cally when I pull out the battery strip.	The batteries are empty.	Replace the batte ries.
	The poles of the batteries point in the wrong direc tion.	Remove the batte ries and reinsert them properly.
	The batteries are not ma king proper contact.	Remove the batte ries and reinsert them properly.
	The measu red tempera ture is lower than 32.4°C/90.3°F or higher than 42.9°C/109.2° F.	Follow the instruc tions in the user manual for proper measurement.
	The device is malfunctio ning.	Contact the Phi lips Consumer Care Center in your country.
	Temperature is out of tem perature mea suring range.	Use the thermome ter in the range of operating condi tions (see 'Specifi cations').
The thermo meter seems to be inaccu rate or the measurement results seem questionable.	The infrared sensor is not clean en ough.	Clean the infrared sensor with a cot ton swab accor ding to user ma nual.
	You are not measuring temperature in the correct way.	Make sure that you have read the user manual and know how to use the device proper ly.
	Your room temperature is too low or too high.	Use your thermo meter at room temperatures bet ween 10.0°C and 40.0°C (50.0°F and 104.0°F).
	You are using the device outdoors.	The device is only intended for in door use.
	You have held the de vice in your hand too long.	Put the device on the table in the room where the measurement is ta king place and let it cool down first.
The battery symbol flashes on the display.	The batteries are empty.	Replace the emp ty batteries with new ones.
The display shows ErrO	Self-test er ror	Remove and re place the batte ries. If the error persists, contact Philips Consumer Care Center in your country.
The display shows Err2	Stabilization error	Wait 30 minutes and measure again.
The display shows Err3	Battery level low	Replace the emp ty batteries with new ones.

Explanation of symbols

-

The warning signs and symbols are essential to en sure that you use this product safely and correctly and to protect you and others from injury. Below you find the meaning of the warning signs and sym bols on the label and in the user manual.

, ^{__}

i	Symbol for 'follow instructions for use'.		
Ŕ	This symbol means that the part of the de vice that comes into physical contact with the user (also known as the applied part) is of type BF (Body Floating) according to IEC 60601-1.		
CE 0344	Symbol for 'the device complies with Euro pean Medical Device Directive 93/42/EEC requirements'. 0344 refers to the notified body.		
X	Symbol for WEEE, waste electrical and electronical equipment. Electrical waste products should not be disposed of with household waste. Please recycle where fa cilities exist. Check with your local authori ty or retailer for recycling advice and see chapter 'Battery recycling'.		
X	This symbol means that this product contains batteries which shall not be dis posed of with normal household waste (2006/66/EC).		
	Indicates the manufacturer, as defined in EU Directives 93/42/EEC.		
Bluetooth	Symbol for the 'Bluetooth Combination mark'. The device uses Bluetooth for com munication.		
SN	Indicates the manufacturer's serial num ber so that a specific medical device can be identified.		
\bigtriangleup	Symbol for indoor use only.		
	Indicates caution. The user should consult the instructions for use for important cau tionary information such as warnings and precautions that cannot, for a variety of reasons, be presented on the medical de vice itself.		
IP22	This symbol on the device means: protec ted against access to hazardous parts with a finger and against vertically falling water drops when tilted up to 15 degrees.		
-arrc	Indicates the storage and transportation temperature limits to which the medical device can be safely exposed: -20°C to 60°C.		
DORLD-WISM CLARANT	Symbol for the 2 year Philips guarantee.		
Ø	The Green Dot ('Der Grüne Punkt' in Ger man) is the license symbol of a European network of industry-funded systems for re cycling the packaging materials of consu mer goods.		
	lectromagnetic emissions and — nmunity		
standa typical	vice is approved according to EMC safety rd EN 60601-1-2. It is designed to be used in domestic environments. MC Guidance		
- The rega put tion	ear thermometer needs special precautions arding EMC and needs to be installed and into service according to the EMC informa provided in this document.		
rele coro kie- sho	eless communications equipment such as wi iss home network devices, mobile phones, dless telephones and their base stations, wal talkies can affect this equipment and uld be kept at least a distance d = 3.3 m		
Note: A equipn output	ay from the equipment. As indicated in IEC 60601-1-2:2007 for ME ment, a typical cell phone with a maximum power of 2 W yields d = 3.3 m at an immuni		
Gu tio	ty level of 3V/m. Guidance and manufacturer's declara tion – electromagnetic emissions – for all ME equipment and ME systems		
Guidar magne The de tic envi the use in such	ince and manufacturer's declaration – electro tic emissions vice is intended for use in the electromagne ironment specified below. The customer or er of the device should assure that it is used an environment. sions test Com Electromagnetic en		
33	pliance vironment - gui		

۱_

_ |

pliance vironment - gui dance

RF emissions CISPR 11	Group 2	The device must emit electromagnetic ener gy in order to perform its intended function. Nearby electronic equipment may be af fected.
RF emissions CISPR 11	Class B	
Harmonic emis sions IEC 61000-3-2	Not ap plicable	-
Voltage fluctua tions/flicker emissions IEC 61000-3-3	Not ap plicable	-

Guidance and manufacturer's declara tion – electromagnetic immunity – for all ME equipment and ME systems

Guidance and manufacturer's declaration - electro

magnetic immunity The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

lmmuni ty test	IEC 60601 test le vel	pliance	Electromagnetic environment - guidance
-------------------	--------------------------------	---------	--

ı [—]

-,

Electro static di scharge (ESD) IEC 61000-4 -2	±6 kV contact ±8 kV air	±6 kV contact ±8 kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic ma terial, the relative humidity should be at least 30%.
Power frequen cy (50/60H z) ma gnetic field IEC 61000-4	3A/m	3A/m	Power frequency magnetic fields should be at levels characteristic of a typical location in a typical commer cial or hospital en vironment.

L

I

-8

Guidance and manufacturer's declara tion – electromagnetic immunity –for ME equipment and ME systems that are not life supporting

Guidance and manufacturer's declaration - electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

IMMUNI TY test	IEC 606 01 TES T LE VEL	Com plia nce le vel	Electromagnetic envi ronment - guidance
Conduc ted RF IEC 61000-4- 6	3 Vrms 150 kHz to 80 MHz	3 Vrms	Portable and mobile RF communications equipment should be used no closer to any part of the device, in cluding cables, than the recommended se paration distance calcu lated from the equa tion applicable to the frequency of the trans mitter.
Radiated RF IEC 61000-4- 3	3 V/m 80 MHz to 2.5 GHz	3 V/m	Recommended separa tion distance: d = 1.167 ÖP d = 1.167 ÖP 80 MHz to 2.5 GHz d = 2.333 ÖP 800 MHz to 2.5 GHz where P is the maxi mum output power ra ting of the transmitter in watts (W) according to the transmitter ma nufacturer and d is the recommended separa tion distance in metres (m). Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey (a), should be less than the com pliance level in each frequency range (b). Interference may occur in the vicinity of equip ment marked with the following symbol:



NOTE 1 At 80 MHz and 800 MHz, the higher fre quency range applies. NOTE 2 These guidelines may not apply in all situa

tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

(a) Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) tele phones and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the device is used exceeds the applicable RF compliance level above, the device should be observed to verify normal operation. If abnormal performance is observed, additional mea sures may be necessary, such as re-orienting or re locating the device.

- _I

(b) Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 3V/m.

Recommended separation distances between portable and mobile RF com equipment or ME system – for ME equipment and ME systems that are not life supporting

Recommended separation distances between por table and mobile RF communications equipment and the device.

The device is intended for use in an electromagne tic environment in which radiated RF disturbances are controlled. The customer or the user of the de vice can help prevent electromagnetic interference by maintaining a minimum distance between por table and mobile RF communications equipment (transmitters) and the device as recommended be low, according to the maximum output power of the communications equipment.

Separation distance according to	
frequency of transmitter (m)	

Rated maximum output po wer of	150 kHz to 80 MHz	80 MHz to 800 MHz	800 MHz to 2.5 GHz d = 1.167 Ö
transmitter (W)	d = 1.167 Ö P	d = 1.167 Ö P	P
0.01	0.117	0.117	0.233

Separation distance according to frequency of transmitter (m)

L

0.1	0.369	0.369	0.738
1	1.167	1.167	2.333
10	3.690	3.690	7.378
100	11.67	11.67	23.33

For transmitters rated at a maximum output power not listed above, the recommended separation dis tance d in metres (m) can be estimated using the equation applicable to the frequency of the trans mitter, where P is the maximum output power ra ting of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE 1 At 80MHz and 800MHz, the separation dis tance for the higher frequency range applies. NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

Deutsch

I

Einführung

Herzlichen Glückwunsch zu Ihrem Kauf und will kommen bei Philips! Um die Unterstützung von Phi lips optimal nutzen zu können, sollten Sie Ihr Pro dukt unter www.philips.com/welcome registrieren. Intended use

The product is intended for measuring the tempera ture of the human body via the ear canal by an in frared sensor. The device is intended for all ages in a home environment.

General

This Philips ear thermometer has been developed for accurate and fast human body temperature measurements in the ear.

Research indicates that the ear is an ideal site for taking the body temperature. The body tempera ture is regulated by the hypothalamus (Abb. 2). The hypothalamus (1) shares the same blood sup ply as the tympanic membrane (2).

Measurement results can be transmitted via Bluetooth® Smart to the Philips HealthSuite health app for charting and tracking purposes.

General description (Fig. 1)

- 1 Protection cap
- 2 Infrared sensor
- 3 Probe tip
- 4 History icon
- 5 Bluetooth® icon
- 6 Battery symbol7 Temperature display
- 8 Power button
- 9 Temperature light ring
- 10 °C/°F selection button
- 11 Battery compartment
- 12 Battery cover

Important safety information

Read this important information carefully before you use the device and save it for future reference.

Warning

Do not measure the body temperature at the ear site if the ear is inflamed or infected.

- Keep the device out of the reach of children.
 Children may not be able to use it according to the instructions in this user manual. It is not a toy.
- Do not throw disposable batteries into fire. Bat teries may explode.
- Do not put the device in a wet ear canal after swimming or bathing. This may cause injury to the ear canal.
- Do not use the device if it is broken or dama ged. Using a broken or damaged device may cause injury.

Caution

-,

- Only use the device as described in this user ma nual. Do not use it for any other purpose.
- The device is not intended as a substitute for consulting a doctor. Measurement results are
- for reference only.
- When the device is used to measure the tempe rature of a child, it has to be operated by an adult.
- If you clean the ear, wait 5-10 minutes before you use the device.
- Earwax in the ear canal may cause inaccurate measurements. Make sure the ear canal is clean before you use the device.
- Do not take apart, repair or change any part of the device at any time.
- Do not store the device in extreme temperature (below -20°C/-4°F or over 60°C/140°F) or in ex treme levels of humidity (below 15%RH or over 85%RH). This may cause inaccurate measure ments.
- Keep the infrared sensor dry, clean and unda maged to ensure accurate measurements.
- Do not touch or blow at the infrared sensor. A polluted infrared sensor may cause inaccurate measurements.
- Never clean the device with an abrasive clea ner, thinner, benzene or immerse the device in water or other liquids.
- When the temperature of the storage area dif fers from the temperature of the measuring area, wait at least 30 minutes before you use the device.

ı —

If you do not intend to use the device for a long period of time, it is advised to remove the batte ries before storing. This is to prevent possible da mage due to leakage of the batteries. If the bat teries leak, remove them carefully and replace with new batteries

L

Compliance with standards

- The device meets the relevant standards for this type of Class IIa medical device for home use
- This Philips device complies with all applicable standards and regulations regarding exposure to electromagnetic fields and complies with EN 60601-1-2

🗖 Display 🗖

_ |

Sym bol	Description	Explanation
Ŀ	History icon	Display shows last mea surement result when switching on the device.
*	Bluetooth® icon	The device uses Bluetooth® for communi cation.
	Battery sym bol	Battery symbol indica ting status of battery.

Battery status indications

Battery full

To indicate that the battery is fully charged the bat tery symbol shows a full battery (Abb. 3). Battery low

To indicate that the battery is low, the battery sym bol shows a nearly empty battery (Abb. 4).

Preparing for use

The batteries (2x 1.5V AAA) are included with the device. Remove the battery strip from the battery compartment before first use

Pairing the thermometer to your mobi le device

Your Philips ear thermometer is equipped with Bluetooth® Smart. Download the Philips HealthSui te health app from the App Store or Google Play. Use the search term: Philips HealthSuite health app. The Philips health app is available for iOS 8.0+ and Android 4.4+.

- Download the Philips health app on your mobile device, start the Setup wizard and follow the steps to create a user profile and add the ther mometer.
- Make sure the Philips health app is active and 2 Bluetooth on your mobile device is on when pai ring is in progress.
- Press the power button once, to switch on the 3 thermometer (Abb. 5).
- The app identifies the thermometer and re quests to pair.
- The Bluetooth icon lights up when the thermo
- meter is connected to your mobile device. The thermometer switches off automatically af 4 ter 30 seconds of no activity.
- When the thermometer has paired successfully with your mobile device, your personal measu rement results are automatically transmitted to your mobile device via Bluetooth.

Note: Only when the Philips HealthSuite health app is active, your personal health data can be transmitted.

Cleaning the infrared sensor

To achieve accurate measurements, it is important to check if the infrared sensor is clean. Use a cot ton swab to clean the infrared sensor.

See chapter Cleaning and storage for instructions. After cleaning, wait approximately 5-10 minutes be fore you use the device.

Cleaning the ear

Earwax in the ear canal may cause inaccurate mea surements. Make sure the ear canal is clean before you use the device.

Carefully clean your ear canal. If you clean your ear, wait for 5-10 minutes before you use the devi ce.

Resetting the thermometer

If you press the $^{\circ}C/^{\circ}F$ selection button on the side of the thermometer for longer than 10 seconds, all measurements are deleted from the device and all settings return to the factory values. Measuring temperature

Tips for proper measurement

External factors can influence your body tempera ture. In the following cases, wait at least 30 minu

tes before taking your temperature:

- When you have been lying on your ear
- When you had your ears covered
- When you have been exposed to very low or ve ry high temperatures
- When you have been swimming or bathing
- If you wear earplugs or hearing aids, remove them first

We do not advise you to use the device in the follo wing circumstances as this may cause inaccurate measurements:

- When the temperature of the storage area dif fers from the temperature of the measuring area. In this case, wait at least 30 minutes befo re vou use the device.
- If you are using ear drops or other ear medicati on. In this case, measure the temperature in the untreated ear (if any).

Body temperature

- _I

Normal body temperature is a range. A person's normal temperature range tends to decrease with age. The following table shows normal tempera ture ranges by age.

The range of normal body temperature varies from person to person and can be influenced by many factors such as time of day, level of activity and emotions.

Age	Temperature in °Celsius	Temperature in °Fahrenheit	
0-2 years	36.4 - 38.0 °C	97.5 - 100.4 °F	

ı [–]

3-10 years	36.1 - 37.8 °C	97.0 - 100.0 °F
11-65 years	35.9 - 37.6 °C	96.6 - 99.7 °F
> 65 years	35.8 - 37.5 °C	96.4 - 99.5 °F

L

Source: Chamberlain, J.M., et al., Determination of Normal Ear Temperature with an Infrared Emission Detection Thermometer, Annals of Emergency Me dicine, January 1995, Vol. 25, pp. 15–20.

Performing a measurement

I

Note: Before measuring, make sure that the probe tip of the device is clean

- Remove the protection cap before you use the device (Abb. 6).
- 2 Press the power button to switch on the device. The display shows the last measurement re sult as well as the history icon
- Hold the outer ear and gently pull it towards the rear of the head to straighten the ear canal. Children under the age of 1: hold the outer 3
 - ear and gently pull it straight back. (Abb. 7) Children aged 1 year or older: hold the outer
 - ear and gently pull the ear up and back (Abb. 8).
- Insert the probe tip very gently and slowly into the ear canal (Abb. 9). 4
 - Make sure the probe tip points straight to wards the eardrum when you hold it.
 - Always insert the probe tip into the same ear, in the same direction and at the same depth. Note: A temperature measurement taken in
 - the right ear may differ from a measurement taken in the left ear
- 5 Press the power button to start the measure ment. (Abb. 10)
 - When the measurement is done, you hear 2 beeps
- Remove the probe tip from the ear canal (Abb. 6 11).
 - The display shows the measured tempera ture and the temperature light ring around the power button lights up green or red, de pending on the measurement result.

Note: The temperature display on the device shows the measurement result for 30 seconds or until you perform a new measurement.

Temperature light ring

This device is equipped with a temperature light ring around the power button (Abb. 12). After the measurement, the ring lights up red or

- green, depending on the measured temperature. When the temperature light ring lights up green, the measured temperature is between 35.5°C (95.9°F) and 37.9°C (100.2°F)
 - When the temperature light ring lights up red, the measured temperature is between 38.0°C (100.4°F) and 42.9°C (109.2°F)

Transmit and display personal measu rement results in the app

Your personal measurement data is only sto Note: red and displayed in the Philips HealthSuite health app

- Start up the Philips HealthSuite health app and switch on Bluetooth on your mobile device
- The Bluetooth symbol will light up on the dis 2 play of the thermometer to indicate it is connec ted to your mobile device
- Once successfully connected, the measurement results will be automatically transmitted to your mobile device via Bluetooth. The Bluetooth sym bol flashes when data is transmitted.
- If the data transmission is successful, the measu rement results are displayed in the Philips he alth app.
- The time and date of each measurement is shown in the Philips health app.
 - Removing/inserting batteries

When the batteries are almost empty, the display shows a flashing battery symbol and the text "bAtt" (Abb. 13).

When the battery low symbol appears on the dis play (Abb. 4) or if the device does not function at all, replace the batteries as soon as possible. The device works on 2x 1.5V AAA batteries.

Data will be lost when the batteries are completely empty or are taken out of the thermometer. 1 Slide the battery cover downwards to open the

- battery compartment and remove the empty batteries (Abb. 14).
- Insert two new batteries in the battery compart 2 ment according to the polarity indications mar ked inside the compartment. Press down the batteries until they click into place (Abb. 15). Slide the battery cover back until it locks into 3 place (Abb. 16).

Setting the measurement unit

You can select either Celsius (°C) or Fahrenheit (°F) for measuring temperature.

- Switch on the device.
- Press and hold the °C/°F selection button for 3 2 seconds to change the measurement unit (Abb. 17).

Cleaning and storage

Use a cotton swab to clean the infrared sensor.

- Moisten the cotton swab with a few drops of al cohol and wipe the surface of the infrared sen sor gently with the swab (Abb. 18).
- 2 Immediately wipe the surface dry with a clean cotton swab.
- Use a soft dry cloth to clean the body of the de 3 vice (Abb. 19)
- Store the device in a clean, dry place at room 4

temperature. A Caution: Do not expose the device to extre me temperatures (below -20°C/-4°F or over 60°C/140°F), extreme levels of humidity (below 15%RH or over 85%RH), direct sunlight or shock. This may result in malfunctions.

Calibration

- I

The device has been calibrated when it was manu factured.

If the device is used according to the instructions periodic recalibration is not required. If you questi

I.

_ |

Specifications		
Power supply	2 x AAA non-rechargeable batte ries	
Temperature measuring range	32.4°C - 42.9°C /90.3°F -109.2°F	
In-ear measu rement accu racy	±0.2°C (±0.4°F) within the range of 32.4°C - 42.9°C (90.3°F - 109.2°F)	
Dimensions	134 (L) x 37 (W) x 27 (D) mm	
Weight	About 54.6g (without battery)	
Operating conditions	10.0°C - 40.0°C (50.0°F - 104.0°F) with a relative humidity of 15% - 85%	
Storage and transport con ditions	-20°C - 60°C (-4°F - 131°F) with a relative humidity of 15% - 85%	

Ordering accessories

To buy accessories or spare parts, visit www.shop.philips.com/service or go to your Philips dealer. You can also contact the Philips Consumer Care Centre in your country (see the worldwide guarantee leaflet for contact details).

- Recycling
- Dieses Symbol bedeutet, dass das Produkt nicht mit dem normalen Hausmüll entsorgt wer den kann (2012/19/EU) (Abb. 20).
- This symbol means that this product contains batteries which shall not be disposed of with normal household waste (2006/66/EC) (Abb. 21).
- Follow your country's rules for the separate col lection of electrical and electronic products and batteries. Correct disposal helps prevent negati ve consequences for the environment and hu man health

Removing disposable batteries

To remove disposable batteries, see the instructi ons for placing and/or removing batteries in the user manual.

Guarantee and support

If you need information or support, please visit www.philips.com/support or read the separate worldwide guarantee leaflet.

If you need more information about the app, plea se visit www.philips.com/healthprograms

Troubleshooting

I

- I

This chapter summarizes the most common pro blems you could encounter with the appliance. If you are unable to solve the problem with the infor mation below, visit www.philips.com/support for a list of frequently asked questions or contact the

Consumer Care	Center in your	
Problem	Possible cau se	
The device does not re spond or re sets automati cally when I pull out the battery strip.	The batteries are empty.	Replace the batte ries.
	The poles of the batteries point in the wrong directi on.	Remove the batte ries and reinsert them properly.
	The batteries are not ma king proper contact.	Remove the batte ries and reinsert them properly.
	The measu red tempera ture is lower than 32.4°C/90.3°F or higher than 42.9°C/109.2° F.	Follow the instruc tions in the user manual for proper measurement.
	The device is malfunctio ning.	Contact the Phi lips Consumer Care Center in your country.
	Temperature is out of tem perature mea suring range.	Use the thermome ter in the range of operating conditi ons (see 'Specifica tions').
The thermo meter seems to be inaccu rate or the measurement results seem questionable.	The infrared sensor is not clean enough.	Clean the infrared sensor with a cot ton swab accor ding to user manu al.
	You are not measuring temperature in the correct way.	Make sure that you have read the user manual and know how to use the device proper ly.
	Your room temperature is too low or too high.	Use your thermo meter at room temperatures bet ween 10.0°C and 40.0°C (50.0°F and 104.0°F).
	You are using the device outdoors.	The device is only intended for in door use.

Problem	Possible cau se	Solution
	You have held the devi ce in your hand too long.	Put the device on the table in the room where the measurement is ta king place and let it cool down first.
The battery symbol flas hes on the display.	The batteries are empty.	Replace the em pty batteries with new ones.
The display shows ErrO	Self-test er ror	Remove and re place the batte ries. If the error persists, contact Philips Consumer Care Center in your country.
The display shows Err2	Stabilization error	Wait 30 minutes and measure again.
The display shows Err3	Battery level low	Replace the em pty batteries with new ones.

_ |

۱_

Explanation of symbols

The warning signs and symbols are essential to en sure that you use this product safely and correctly and to protect you and others from injury. Below you find the meaning of the warning signs and sym bols on the label and in the user manual.

i	Symbol for 'follow instructions for use'.
Ŕ	This symbol means that the part of the de vice that comes into physical contact with the user (also known as the applied part) is of type BF (Body Floating) according to IEC 60601-1.
CE 0344	Symbol for 'the device complies with Euro pean Medical Device Directive 93/42/EEC requirements'. 0344 refers to the notified body.
	Symbol for WEEE, waste electrical and electronical equipment. Electrical waste products should not be disposed of with household waste. Please recycle where fa cilities exist. Check with your local authori ty or retailer for recycling advice and see chapter 'Battery recycling'.
X	This symbol means that this product con tains batteries which shall not be disposed of with normal household waste (2006/66/EC).
	Indicates the manufacturer, as defined in EU Directives 93/42/EEC.
Bluetooth	Symbol for the 'Bluetooth Combination mark'. The device uses Bluetooth for com munication.
SN	Indicates the manufacturer's serial num ber so that a specific medical device can be identified.
	Symbol for indoor use only.
	Indicates caution. The user should consult the instructions for use for important cau tionary information such as warnings and precautions that cannot, for a variety of re asons, be presented on the medical devi ce itself.
IP22	This symbol on the device means: protec ted against access to hazardous parts with a finger and against vertically falling water drops when tilted up to 15 degrees.
-20°C	Indicates the storage and transportation temperature limits to which the medical device can be safely exposed: -20°C to 60°C.
Concerto A	Symbol for the 2 year Philips guarantee.
C	The Green Dot ('Der Grüne Punkt' in Ger man) is the license symbol of a European

man) is the license symbol of a European network of industry-funded systems for re cycling the packaging materials of consu mer goods.

Electromagnetic emissions and minimunity

The device is approved according to EMC safety standard EN 60601-1-2. It is designed to be used in typical domestic environments.

EMC Guidance

-,

- The ear thermometer needs special precautions regarding EMC and needs to be installed and put into service according to the EMC informati on provided in this document.
- Wireless communications equipment such as wi reless home network devices, mobile phones, cordless telephones and their base stations, wal kie-talkies can affect this equipment and should be kept at least a distance d = 3.3 m away from the equipment.

away from the equipment. Note: As indicated in IEC 60601-1-2:2007 for ME equipment, a typical cell phone with a maximum output power of 2 W yields d = 3.3 m at an immuni ty level of 3V/m.

Guidance and manufacturer's declara tion – electromagnetic emissions - for all ME equipment and ME systems

Guidance and manufacturer's declaration – electro magnetic emissions

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

Emissions test	Com pliance	Electromagnetic en vironment - gui dance
RF emissions CISPR 11	Group 2	The device must emit electromagnetic ener gy in order to perform its intended function. Nearby electronic equipment may be af fected.
RF emissions CISPR 11	Class B	

L

Voltage fluctuati Not ap ons/flicker emis plicable sions IEC 61000-3-3

Guidance and manufacturer's declara tion – electromagnetic immunity – for all ME equipment and ME systems

Guidance and manufacturer's declaration – electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

lmmuni ty test	IEC 60601 test le vel	Com pliance level	Electromagnetic environment - guidance
Electro static dischar ge (ESD) IEC 61000-4 -2	±6 kV contact ±8 kV air	±6 kV contact ±8 kV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic ma terial, the relative humidity should be at least 30%.
Power frequen cy (50/60H z) ma gnetic field IEC 61000-4 -8	3A/m	3A/m	Power frequency magnetic fields should be at levels characteristic of a typical location in a typical commerci al or hospital envi ronment.

Guidance and manufacturer's declara tion – electromagnetic immunity –for ME equipment and ME systems that are not life supporting

Guidance and manufacturer's declaration – electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

IMMUNI TY test	IEC 606 01 TES T LE VEL	Com plia nce le vel	Electromagnetic envi ronment - guidance
Conduc ted RF IEC 61000-4-	3 Vrms 150 kHz	3 Vrms	Portable and mobile RF communications equipment should be used no closer to any part of the device, in
6	to 80 MHz		cluding cables, than the recommended se paration distance calcu lated from the equati on applicable to the frequency of the trans
Radiated RF	3 3 V/m V/m	mitter. Recommended separa tion distance:	
IEC 80 61000-4- 21.5 GHz	d = 1.167 ÖP		
	d = 1.167 ÖP 80 MHz to 2.5 GHz		
		d = 2.333 ÖP 800 MHz to 2.5 GHz	
			where P is the maxi mum output power ra ting of the transmitter in watts (W) according to the transmitter ma nufacturer and d is the recommended separati

Field strengths from fi xed RF transmitters, as determined by an elec tromagnetic site survey (a), should be less than the compliance level in each frequency range (b).

on distance in metres

Interference may occur in the vicinity of equip ment marked with the following symbol:

1



(m).

NOTE 1 At 80 MHz and 800 MHz, the higher fre quency range applies. NOTE 2 These guidelines may not apply in all situa

NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

(a) Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) telepho nes and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the device is used exceeds the applicable RF compliance level above, the device should be observed to verify normal operation. If abnormal performance is observed, additional mea

- _I

L

I

(b) Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 3V/m

Recommended separation distances between portable and mobile RF com munications equipment and the ME equipment or ME system – for ME equipment and ME systems that are not life supporting

Recommended separation distances between por table and mobile RF communications equipment and the device.

The device is intended for use in an electromagne tic environment in which radiated RF disturbances are controlled. The customer or the user of the devi ce can help prevent electromagnetic interference by maintaining a minimum distance between porta ble and mobile RF communications equipment (transmitters) and the device as recommended be low, according to the maximum output power of the communications equipment.

		distance a of transmitt	
Rated ma ximum out put power	150 kHz to 80 MHz	80 MHz to 800 MHz	800 MHz to 2.5 GHz
of transmit ter (W)	d = 1.167 Ö P	d = 1.167 Ö P	d = 1.167 Ö P
0.01	0.117	0.117	0.233
0.1	0.369	0.369	0.738
1	1.167	1.167	2.333
10	3.690	3.690	7.378
100	11.67	11.67	23.33

For transmitters rated at a maximum output power not listed above, the recommended separation di stance d in metres (m) can be estimated using the equation applicable to the frequency of the trans mitter, where P is the maximum output power ra ting of the transmitter in watts (W) according to the transmitter manufacturer

NOTE 1 At 80MHz and 800MHz, the separation di stance for the higher frequency range applies. NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

Introduction

Congratulations on your purchase and welcome to Philips! To fully benefit from the support that Phi lips offers, register your product at www.phi lips.com/welcome

Intended use

The product is intended for measuring the tempera ture of the human body via the ear canal by an in frared sensor. The device is intended for all ages in a home environment.

General

This Philips ear thermometer has been developed for accurate and fast human body temperature measurements in the ear

Research indicates that the ear is an ideal site for taking the body temperature. The body temperatu The hy re is regulated by the hypothalamus (fig. 2). pothalamus (1) shares the same blood supply as the tympanic membrane (2).

Measurement results can be transmitted via Bluetooth[®] Smart to the Philips HealthSuite health app for charting and tracking purposes

General description (Fig. 1)

- Protection cap 1
- 2 Infrared sensor
- 3 Probe tip
- History icon 4
- Bluetooth® icon 5
- Battery symbol 6 7 Temperature display
- 8 Power button
- Temperature light ring 9
- 10 °C/°F selection button
- Battery compartment
- 12 Battery cover

Important safety information

Read this important information carefully before you use the device and save it for future reference.

Warning



- Do not measure the body temperature at the ear site if the ear is inflamed or infected.
- Keep the device out of the reach of children. Children may not be able to use it according to the instructions in this user manual. It is not a toy.
- Do not throw disposable batteries into fire. Bat teries may explode.
- Do not put the device in a wet ear canal after swimming or bathing. This may cause injury to the ear canal.
- Do not use the device if it is broken or dama ged. Using a broken or damaged device may cause iniurv.

Caution



- _I

Only use the device as described in this user ma nual. Do not use it for any other purpose

ı [—]

The device is not intended as a substitute for consulting a doctor. Measurement results are for reference only.

When the device is used to measure the tempe rature of a child, it has to be operated by an adult

L

_ |

- If you clean the ear, wait 5-10 minutes before you use the device.
- Earwax in the ear canal may cause inaccurate measurements. Make sure the ear canal is clean before you use the device.
- Do not take apart, repair or change any part of the device at any time.
- Do not store the device in extreme temperature (below -20°C/-4°F or over 60°C/140°F) or in extreme levels of humidity (below 15%RH or over 85%RH). This may cause inaccurate measure ments
- Keep the infrared sensor dry, clean and unda maged to ensure accurate measurements
- Do not touch or blow at the infrared sensor. A polluted infrared sensor may cause inaccurate measurements.
- Never clean the device with an abrasive clea ner, thinner, benzene or immerse the device in water or other liquids.
- When the temperature of the storage area dif fers from the temperature of the measuring area, wait at least 30 minutes before you use the device
- If you do not intend to use the device for a long period of time, it is advised to remove the batte ries before storing. This is to prevent possible da mage due to leakage of the batteries. If the bat teries leak, remove them carefully and replace with new batteries

Compliance with standards

- The device meets the relevant standards for this
- type of Class IIa medical device for home use This Philips device complies with all applicable standards and regulations regarding exposure to electromagnetic fields and complies with EN 60601-1-2

🗕 Display 🗖

Sym bol	Description	Explanation
	History icon	Display shows last mea surement result when switching on the device.
*	Bluetooth® icon	The device uses Bluetooth® for communi cation.
	Battery sym bol	Battery symbol indica ting status of battery.

ting status of battery.

Battery status indications

Battery full

To indicate that the battery is fully charged the bat tery symbol shows a full battery (fig. 3). Battery low

To indicate that the battery is low, the battery sym bol shows a nearly empty battery (fig. 4).

Preparing for use

The batteries (2x 1.5V AAA) are included with the device. Remove the battery strip from the battery compartment before first use.

Pairing the thermometer to your mobi le device

Your Philips ear thermometer is equipped with Bluetooth® Smart. Download the Philips HealthSui te health app from the App Store or Google Play. Use the search term: Philips HealthSuite health app. The Philips health app is available for iOS 8.0+ and Android 4.4+

- Download the Philips health app on your mobile device, start the Setup wizard and follow the steps to create a user profile and add the ther mometer.
- Make sure the Philips health app is active and 2 Bluetooth on your mobile device is on when pai ring is in progress.
- Press the power button once, to switch on the 3 thermometer (fig. 5).
- The app identifies the thermometer and re quests to pair.
- The Bluetooth icon lights up when the thermo meter is connected to your mobile device
- 4 The thermometer switches off automatically af ter 30 seconds of no activity.
- When the thermometer has paired successfully with your mobile device, your personal measu rement results are automatically transmitted to your mobile device via Bluetooth.
- Only when the Philips

Note HealthSuite health app is active, your personal health data can be tran smitted.

Cleaning the infrared sensor (

To achieve accurate measurements, it is important to check if the infrared sensor is clean. Use a cot ton swab to clean the infrared sensor.

See chapter Cleaning and storage for instructions. After cleaning, wait approximately 5-10 minutes be fore you use the device.

Cleaning the ear

Earwax in the ear canal may cause inaccurate mea surements. Make sure the ear canal is clean before you use the device.

Carefully clean your ear canal. If you clean your ear, wait for 5-10 minutes before you use the devi ce.

Resetting the thermometer

If you press the °C/°F selection button on the side the thermometer for longer than 10 seconds, all of measurements are deleted from the device and all settings return to the factory values.

Measuring temperature

Tips for proper measurement

External factors can influence your body tempera ture. In the following cases, wait at least 30 minu tes before taking your temperature:

- When you have been lying on your ear
- When you had your ears covered

-,

When you have been exposed to very low or ve ry high temperatures

, -

When you have been swimming or bathing

If you wear earplugs or hearing aids, remove them first

We do not advise you to use the device in the follo wing circumstances as this may cause inaccurate measurements:

L

- When the temperature of the storage area dif fers from the temperature of the measuring area. In this case, wait at least 30 minutes befo re vou use the device.
- If you are using ear drops or other ear medica tion. In this case, measure the temperature in the untreated ear (if any).

Body temperature

_ |

Normal body temperature is a range. A person's normal temperature range tends to decrease with age. The following table shows normal temperatu re ranges by age.

The range of normal body temperature varies from person to person and can be influenced by many factors such as time of day, level of activity and emotions

Age	Temperature in °Celsius	Temperature in °Fahrenheit
0-2 years	36.4 - 38.0 °C	97.5 - 100.4 °F
3-10 years	36.1 - 37.8 °C	97.0 - 100.0 °F
11-65 years	35.9 - 37.6 °C	96.6 - 99.7 °F
> 65 years	35.8 - 37.5 °C	96.4 - 99.5 °F

Source: Chamberlain, J.M., et al., Determination of Normal Ear Temperature with an Infrared Emission Detection Thermometer, Annals of Emergency Me dicine, January 1995, Vol. 25, pp. 15-20.

Performing a measurement

Note: Before measuring, make sure that the probe tip of the device is clean

- Remove the protection cap before you use the device (fig. 6).
- 2 Press the power button to switch on the device. The display shows the last measurement re sult as well as the history icon.
- 3 Hold the outer ear and gently pull it towards the rear of the head to straighten the ear canal.
 - Children under the age of 1: hold the outer ear and gently pull it straight back. (fig. 7) Children aged 1 year or older: hold the outer
 - ear and gently pull the ear up and back (fig. 8).
- 4 Insert the probe tip very gently and slowly into the ear canal (fig. 9).
 - Make sure the probe tip points straight to wards the eardrum when you hold it.
 - Always insert the probe tip into the same ear, in the same direction and at the same depth.

Note: A temperature measurement taken in the right ear may differ from a measurement taken in the left ear

- Press the power button to start the measure 5 ment. (fig. 10)
 - When the measurement is done, you hear 2 beeps
- 6 Remove the probe tip from the ear canal (fig. 11).
 - The display shows the measured temperatu re and the temperature light ring around the power button lights up green or red, depen ding on the measurement result.

Note: The temperature display on the device sho ws the measurement result for 30 seconds or until you perform a new measurement.

Temperature light ring

This device is equipped with a temperature light ring around the power button (fig. 12). After the measurement, the ring lights up red or

- green, depending on the measured temperature. When the temperature light ring lights up green, the measured temperature is between 35.5°C (95.9°F) and 37.9°C (100.2°F)
- When the temperature light ring lights up red, the measured temperature is between 38.0°C (100.4°F) and 42.9°C (109.2°F)

Transmit and display personal measu rement results in the app

Note: Your personal measurement data is only sto red and displayed in the Philips HealthSuite health app

- Start up the Philips HealthSuite health app and switch on Bluetooth on your mobile device
- The Bluetooth symbol will light up on the di 2 splay of the thermometer to indicate it is con nected to vour mobile device.
- Once successfully connected, the measurement results will be automatically transmitted to your mobile device via Bluetooth. The Bluetooth sym bol flashes when data is transmitted.
- If the data transmission is successful, the measu rement results are displayed in the Philips heal th app.
- The time and date of each measurement is sho wn in the Philips health app.

Removing/inserting batteries

When the batteries are almost empty, the display shows a flashing battery symbol and the text "bAtt" (fig. 13).

When the battery low symbol appears on the di splay (fig. 4) or if the device does not function at all, replace the batteries as soon as possible. The device works on 2x 1.5V AAA batteries.

Data will be lost when the batteries are completely empty or are taken out of the thermometer. 1 Slide the battery cover downwards to open the

- battery compartment and remove the empty batteries (fig. 14).
- Insert two new batteries in the battery compart 2 ment according to the polarity indications mar ked inside the compartment. Press down the batteries until they click into place (fig. 15).
- Slide the battery cover back until it locks into 3 place (fig. 16).

Setting the measurement unit

You can select either Celsius (°C) or Fahrenheit (°F) for measuring temperature.

, -

Switch on the device.

-,

2 Press and hold the °C/°F selection button for 3 seconds to change the measurement unit (fig. 17).

L

Cleaning and storage

I

Use a cotton swab to clean the infrared sensor.

- Moisten the cotton swab with a few drops of al cohol and wipe the surface of the infrared sen sor gently with the swab (fig. 18).
- 2 Immediately wipe the surface dry with a clean cotton swab.
- 3 Use a soft dry cloth to clean the body of the de vice (fig. 19).
- 4 Store the device in a clean, dry place at room temperature.

▲ Caution: Do not expose the device to extreme temperatures (below -20°C/-4°F or over 60°C/140°F), extreme levels of humidity (below 15%RH or over 85%RH), direct sunlight or shock. This may result in malfunctions.

Calibration

The device has been calibrated when it was manu factured.

If the device is used according to the instructions, periodic recalibration is not required. If you que stion the accuracy of the measurement at any ti me, contact the Consumer Care Centre in your country.

Do not attempt to modify or reassemble the devi ce.

specifications			
Power supply	2 x AAA non-rechargeable batte ries		
Temperature measuring range	32.4°C - 42.9°C /90.3°F -109.2°F		
In-ear measu rement accu racy	±0.2°C (±0.4°F) within the range of 32.4°C - 42.9°C (90.3°F - 109.2°F)		
Dimensions	134 (L) x 37 (W) x 27 (D) mm		
Weight	About 54.6g (without battery)		
Operating conditions	10.0°C - 40.0°C (50.0°F - 104.0°F) with a relative humidity of 15% - 85%		
Storage and transport con ditions	-20°C - 60°C (-4°F - 131°F) with a relative humidity of 15% - 85%		

Ordering accessories

To buy accessories or spare parts, visit www.shop.philips.com/service or go to your Philips dealer. You can also contact the Philips Consumer Care Centre in your country (see the worldwide guarantee leaflet for contact details).

Reciclaggio

- Questo simbolo indica che il prodotto non può essere smaltito con i normali rifiuti domestici (2012/19/UE) (fig. 20).
- This symbol means that this product contains batteries which shall not be disposed of with normal household waste (2006/66/EC) (fig. 21)
- normal household waste (2006/66/EC) (fig. 21).
 Follow your country's rules for the separate col lection of electrical and electronic products and batteries. Correct disposal helps prevent negati ve consequences for the environment and hu man health.

Rimozione delle batterie usa e getta

Per rimuovere le batterie usa e getta, vedere le istruzioni per il posizionamento e/o la rimozione delle batterie nel manuale dell'utente.

Guarantee and support

If you need information or support, please visit www.philips.com/support or read the separate worldwide guarantee leaflet.

If you need more information about the app, plea se visit www.philips.com/healthprograms

Troubleshooting

F

- 1

This chapter summarizes the most common pro blems you could encounter with the appliance. If you are unable to solve the problem with the infor mation below, visit www.philips.com/support for a list of frequently asked questions or contact the Consumer Care Center in your country.

Problem	Possible cau	Solution
	se	

The device does not re spond or re sets automati cally when I pull out the battery strip.	The batteries are empty.	Replace the batte ries.
	The poles of the batteries point in the wrong direc tion.	Remove the batte ries and reinsert them properly.
	The batteries are not ma king proper contact.	Remove the batte ries and reinsert them properly.
	The measu red tempera ture is lower than 32.4°C/90.3°F or higher than 42.9°C/109.2° F.	Follow the instruc tions in the user manual for proper measurement.
	The device is malfunctio ning.	Contact the Phi lips Consumer Ca re Center in your country.

Problem	Possible cau se	Solution
	Temperature is out of tem perature mea suring range.	Use the thermome ter in the range of operating condi tions (see 'Specifi cations').
The thermo meter seems to be inaccu rate or the measurement results seem questionable.	The infrared sensor is not clean enou gh.	Clean the infrared sensor with a cot ton swab accor ding to user ma nual.
	You are not measuring temperature in the correct way.	Make sure that you have read the user manual and know how to use the device proper ly.
	Your room temperature is too low or too high.	Use your thermo meter at room temperatures bet ween 10.0°C and 40.0°C (50.0°F and 104.0°F).
	You are using the device outdoors.	The device is only intended for in door use.
	You have held the devi ce in your hand too long.	Put the device on the table in the room where the measurement is ta king place and let it cool down first.
The battery symbol fla shes on the display.	The batteries are empty.	Replace the emp ty batteries with new ones.
The display shows ErrO	Self-test er ror	Remove and repla ce the batteries. If the error persists, contact Philips Consumer Care Center in your country .
The display shows Err2	Stabilization error	Wait 30 minutes and measure again.
The display shows Err3	Battery level low	Replace the emp ty batteries with new ones.

۱_

_ '

Explanation of symbols

The warning signs and symbols are essential to en sure that you use this product safely and correctly and to protect you and others from injury. Below you find the meaning of the warning signs and sym bols on the label and in the user manual.

i	Symbol for 'follow instructions for use'.
ҟ	This symbol means that the part of the de vice that comes into physical contact with the user (also known as the applied part) is of type BF (Body Floating) according to IEC 60601-1.
CE 0344	Symbol for 'the device complies with Euro pean Medical Device Directive 93/42/EEC requirements'. 0344 refers to the notified body.
	Symbol for WEEE, waste electrical and electronical equipment. Electrical waste products should not be disposed of with household waste. Please recycle where fa cilities exist. Check with your local authori ty or retailer for recycling advice and see chapter 'Battery recycling'.
X	This symbol means that this product con tains batteries which shall not be disposed of with normal household waste (2006/66/EC).
	Indicates the manufacturer, as defined in EU Directives 93/42/EEC.
Bluetooth	Symbol for the 'Bluetooth Combination mark'. The device uses Bluetooth for com munication.



Indicates the manufacturer's serial num ber so that a specific medical device can be identified.



Symbol for indoor use only.



Indicates caution. The user should consult the instructions for use for important cau tionary information such as warnings and precautions that cannot, for a variety of reasons, be presented on the medical de vice itself.

IP22 This symbol on the device means: protec ted against access to hazardous parts with a finger and against vertically falling water drops when tilted up to 15 degrees.





Symbol for the 2 year Philips guarantee.



- _I

The Green Dot ('Der Grüne Punkt' in Ger man) is the license symbol of a European network of industry-funded systems for re cycling the packaging materials of consu mer goods.

Electromagnetic emissions and immunity

L

The device is approved according to EMC safety standard EN 60601-1-2. It is designed to be used in typical domestic environments.

EMC Guidance

1

- The ear thermometer needs special precautions regarding EMC and needs to be installed and put into service according to the EMC informa tion provided in this document.
- Wireless communications equipment such as wi reless home network devices, mobile phones, cordless telephones and their base stations, wal kie-talkies can affect this equipment and should be kept at least a distance d = 3.3 m away from the equipment

away from the equipment. Note: As indicated in IEC 60601-1-2:2007 for ME equipment, a typical cell phone with a maximum output power of 2 W yields d = 3.3 m at an immuni ty level of 3V/m.

Guidance and manufacturer's declara tion – electromagnetic emissions - for all ME equipment and ME systems

Guidance and manufacturer's declaration – electro magnetic emissions

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

Emissions test	Com pliance	Electromagnetic en vironment - guidan ce
RF emissions CI SPR 11	Group 2	The device must emit electromagnetic ener gy in order to perform its intended function. Nearby electronic equipment may be af fected.
RF emissions CI SPR 11	Class B	
Harmonic emis sions IEC 61000-3-2	Not ap plicable	
Voltage fluctua tions/flicker	Not ap plicable	

emissions IEC 61000-3-3

> Guidance and manufacturer's declara tion – electromagnetic immunity – for all ME equipment and ME systems

Guidance and manufacturer's declaration – electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

In such an environment. Immuni IEC Com Electromagnetic					
ty test	60601 test le vel	pliance level	Electromagnetic environment - guidance		
Electro static di	±6 kV contact	±6 kV contact	Floors should be wood, concrete or		
scharge (ESD) IEC 61000-4 -2	±8 kV air	±8 kV air	ceramic tile. If floors are covered with synthetic ma terial, the relative humidity should be at least 30%.		
Power frequen cy (50/60H z) ma gnetic field IEC 61000-4 -8	3A/m	3A/m	Power frequency magnetic fields should be at levels characteristic of a typical location in a typical commer cial or hospital en vironment.		

Guidance and manufacturer's declara tion – electromagnetic immunity –for ME equipment and ME systems that are not life supporting

Guidance and manufacturer's declaration – electro magnetic immunity

The device is intended for use in the electromagne tic environment specified below. The customer or the user of the device should assure that it is used in such an environment.

I

- _I



Com Electromagnetic envi plia ronment - guidance

ı [–]

01 nce TE le ST vel LE VEL

Conduc ted RF IEC 61000-4- 6	3 Vrms 150 kHz to 80 MHz	3 Vrms	Portable and mobile RF communications equipment should be used no closer to any part of the device, in cluding cables, than the recommended se paration distance calcu lated from the equa tion applicable to the
Radiated RF	3 V/m	3 V/m	frequency of the tran smitter. Recommended separa
IEC 61000-4-	80 MHz		tion distance: d = 1.167 ÖP
-	to 2.5 GHz		d = 1.167 ÖP 80 MHz to 2.5 GHz
	GHZ		d = 2.333 ÖP 800 MHz to 2.5 GHz
			where P is the maxi mum output power ra ting of the transmitter in watts (W) according to the transmitter ma nufacturer and d is the recommended separa tion distance in metres (m).
			Field strengths from fi xed RF transmitters, as determined by an elec tromagnetic site survey (a), should be less than the compliance level in each frequency range

I

Interference may occur in the vicinity of equip ment marked with the following symbol: L

((...))

(b).

NOTE 1 At 80 MHz and 800 MHz, the higher fre quency range applies.

NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

(a) Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) telepho nes and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the device is used exceeds the applicable RF compliance level above, the device should be observed to verify normal operation. If abnormal performance is observed, additional mea sures may be necessary, such as re-orienting or re locating the device.

(b) Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 3V/m.

Recommended separation distances between portable and mobile RF com munications equipment and the ME equipment or ME system – for ME equipment and ME systems that are not life supporting

Recommended separation distances between por table and mobile RF communications equipment and the device.

The device is intended for use in an electromagne tic environment in which radiated RF disturbances are controlled. The customer or the user of the devi ce can help prevent electromagnetic interference by maintaining a minimum distance between porta ble and mobile RF communications equipment (transmittlers) and the device as recommended be low, according to the maximum output power of the communications equipment.

Separation distance according to frequency of transmitter (m)

Rated ma ximum out put power	150 kHz to 80 MHz	80 MHz to 800 MHz	800 MHz to 2.5 GHz
	d = 1.167 Ö P		d = 1.167 Ö P
0.01	0.117	0.117	0.233

0.1	0.369	0.369	0.738
1	1.167	1.167	2.333
10	3.690	3.690	7.378
100	11.67	11.67	23.33

For transmitters rated at a maximum output power not listed above, the recommended separation di stance d in metres (m) can be estimated using the equation applicable to the frequency of the tran smitter, where P is the maximum output power ra ting of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE 1 At 80MHz and 800MHz, the separation di stance for the higher frequency range applies. NOTE 2 These guidelines may not apply in all situa tions. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

ı [—]

- _I