



PHILIPS

CONTROLS:

- LED :Indicates Power On Status(Green LED)
Power :Use this for ON&OFF switching(backside)
Volume :Turn Clockwise to Increase Level
Treble :Turn Clockwise to Increase High Frequency Effect




OPERATION:

1. Press the POWER button to turn on the speaker system.
The power indicator illuminates.
2. Turn on the audio source.
3. Adjust the VOLUME control on the main speaker to a desirable listening level.
4. To turn off the speaker system, press the POWER button again.
The power indicator turns off.

CONNECTIONS:

Speaker Box with Control

- Mains cord : Connect your set to power source(180V-260V,50Hz)
- Input(L-R) : Connect any 2 channel source(non amplified) to the Red and White sockets.Red-Right,White-Left.
- Output(TOL) : Left speaker is already connected to active speaker

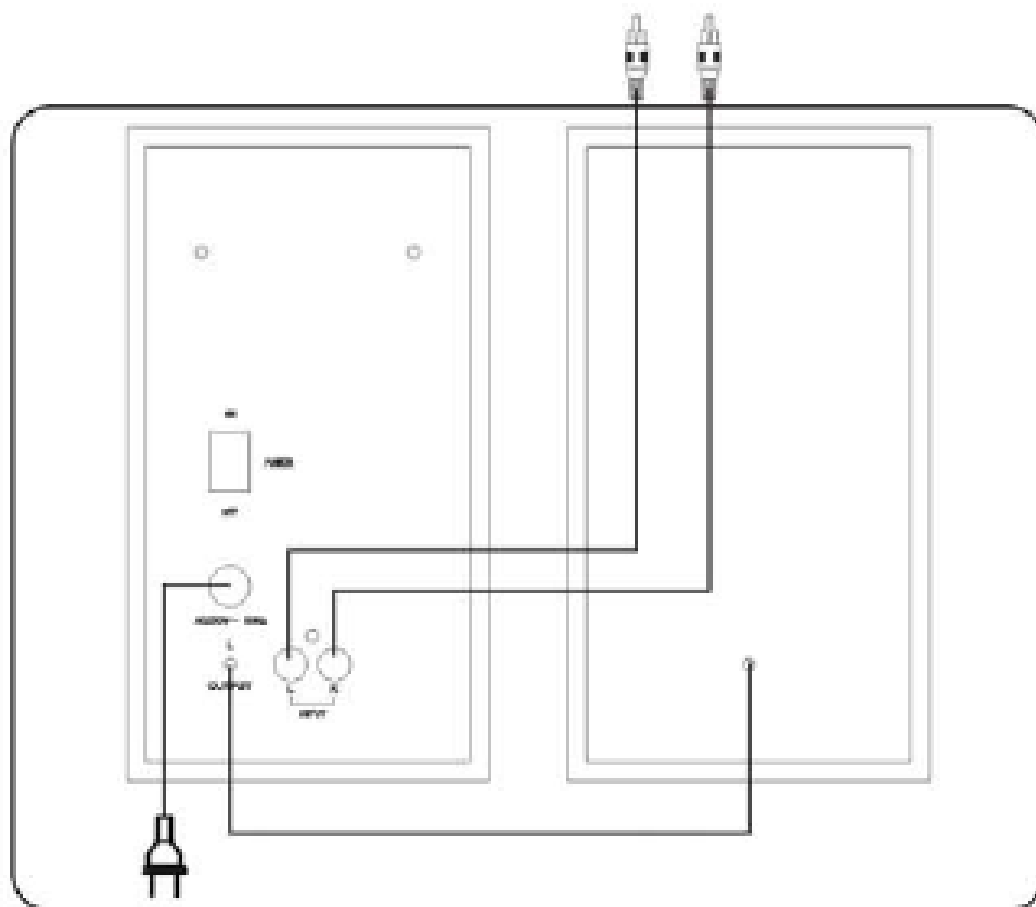

For Best performance:

- Always keep speaker covered when not in use
- Minimise Input Power Fluctuations

Specifications

MULTIMEDIA AMPLIFIER (Built in active speaker)

Power	12Wx2
Input sensitivity	1V
Audio input socket	RCA
Separation	>40dB
THD	< 0.3% at 1W, 1KHz

ACTIVE SPEAKER

Impedance	4 Ohms
Speaker size	88mm
Speaker type	Full range
Frequency response	100Hz to 18KHz
Dimension (WxHxD)	115x210x140mm
Weight	1.4 Kg

PASSIVE SPEAKER

Impedance	4 Ohms
Speaker size	88mm
Speaker type	Full range
Frequency response	100Hz to 18KHz
Dimension (WxHxD)	115x210x130mm
Weight	0.6 Kg