


Headphone stereo

AQ 6598

Stereo radio cassette player

- *Auto reverse tape playback*
- *AM/FM stereo tuner*
- *Dynamic bass boost*
- *Anti-rolling mechanism*
- *Extended playing time (tape playback)*
- *Slim, compact design*
- *Full auto stop*
- *Stereo in-earphones*
- *Detachable belt clip*

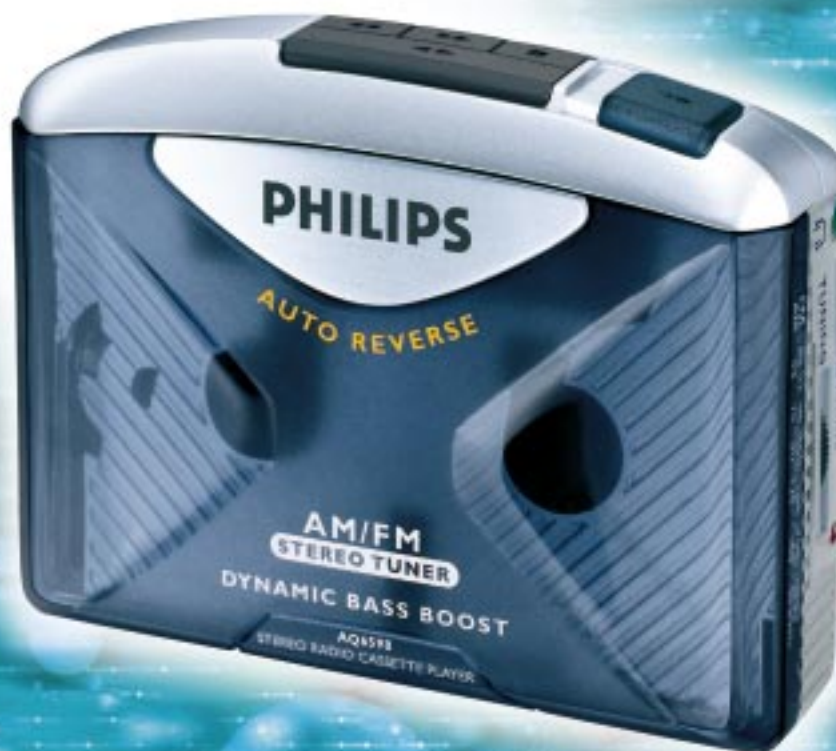

Let's make things better.



PHILIPS

Headphone stereo

AQ 6598

Standard product information

Cassette deck

- Auto reverse
- Full automatic stop
- Anti-rolling mechanism

Tuner

- Analogue tuning
- Wavebands : AM/FM/FM stereo
- Frequency ranges : FM 87.5 - 108 MHz
- : AM 526.5 - 606.5 kHz
- Wire aerial for FM via headphone cord
- Ferroceptor for AM

Amplifier

- Max. output power : 2 x 5mW RMS via headphone
- Dynamic bass boost (2 position)

Power supply

- Batteries : 2 x 1.5V, type AA/R6P cell
- Battery life (approx) : Tape playback: 18 hours with Philips POWERLIFE batteries
- : 30 hours with Philips POWERLIFE batteries
- FM reception : 3V DC
- External supply : 3V DC
- LED battery indicator

Connections

- Headphone socket : 3.5mm
- DC in : 3.4 mm, 3V, centre '-'

Accessories

- Stereo in-earphones
- Detachable belt clip

General

- Material : polystyrene
- Weight : 180g (excluding batteries)
- Dimensions : 111 mm W x 87 mm H x 32 mm D
- Quantity/ dealercarton : 6
- Quantity/ mastercarton : 12

Product highlights

- **Stereo In-earphones**
High-quality headphones supplied with unit offers a wider dynamic range for excellent sound quality.
- **High-quality finish**
Strong, durable casing, easy-to-operate controls and a very - eye-catching design reflect the high quality of this product.
- **Detachable belt clip**
For convenient, hands-free music on the move.

1999-12-10
Printed in Hong Kong
Subject to modification without notice
© 1999 Royal Philips Electronics
All Rights Reserved.

<http://www.philips.com>

Let's make things better.



PHILIPS