

CDR Mini System

FW-R8

Mini Hi-Fi System with Integrated CD-Recorder

- 2 x 200 Watts Music Power
- Make your own CDs with integrated CD-Recorder
- 3 CD Changer
- Double speed recording from CD
- CD Text input, editing and recording
- Simplified recording modes : CD > CD and Compile CD
- Record onto CD from CD changer, radio or any external source
- Automatic Level Control for perfect compilations with the same volume level
- Microphone mixing input with level control
- Full Bass and Treble Control with Loudness on/off
- 3-way Bass Reflex Speaker System
- Subwoofer ready
- Digital and line input and output
- 42-key Remote Control



Let's make things better.



PHILIPS

Mini Hi-Fi System with Integrated CD-Recorder

standard product information

amplifier

- 2 x 200 watts Music Power
- 2 x 100 watts RMS, $\pm 10\%$ THD, 6Ohm, 1kHz
- Full Bass and Treble Control
- Incredible Surround™
- Loudness and Pure on/off
- Balance Left/Right (via remote control)

compact disc recorder

- Records on all Digital Audio CD-R and CD-RW discs
- Double speed recording and finalising from CD changer
- CD Text input, edit and record
- Automatic Level Control ensures constant playback volume of compilation CDs
- Direct Line Recording for bit-perfect recording from CD changer
- Play modes (repeat/shuffle/program)
- CD-Rewritable compatible

compact disc changer

- CD Text
- Motorized front loading 3 CD changer
- CD-Rewritable compatible
- Track (A-B) editing mode
- Play modes (repeat/shuffle/program)
- Change 2 discs while playing 1
- Plays unfinalized CD-R and CD-RW discs

tuner

- FM/MW/LW digital tuner with 40 presets
- Full RDS suite with News! and traffic announcement (/22 only)
- Easy Set/auto store for radio and clock

loudspeaker boxes

- 3-way Bass Reflex System
- 6.5" Woofer
- 2.5" Ferro Fluid cooled Tweeter
- 1" polydome tweeter
- detachable speaker cloth
- click-fit connectors


connections

- Digital input with sample rate converter (12-56 kHz) : cinch type socket
- Digital output (44.1 kHz) : cinch type socket
- Line input and output : cinch type sockets
- Subwoofer output : cinch type sockets
- Microphone input : 3.5 mm jack
- Stereo headphone output : 3.5 mm stereo jack

general

- Large multi colour FTD display with dot-matrix text and music calendar
- 7 band spectrum analyzer
- Display dimming in 3 steps (via remote control)
- Demo mode and dealer tray blocking mode
- Clock with record/wake-up/sleep timer
- 42-key remote control
- Energy Saving standby mode (<2 watts)

	/21	/22	/37
Asia Pacific	•	•	•
Australia/NZ	•	•	•
E Europe	•	•	•
Europe	•	•	•
Korea	•	•	•
Latam	•	•	•
Mexico	•	•	•
Middle East/S Africa	•	•	•
tuner			
FM-87.5-108MHz	•	•	•
MW531-1602kHz	•	•	•
MW530-1700kHz	•	•	•
LW153-279kHz	•	•	•
RDS-News!-TA	•	•	•
FM750 Ohm coaxial	•	•	•
FM300 Ohm click fit	•	•	•
mains supply			
120/240V 50Hz	•	•	•
230V/50Hz	•	•	•
120V/60Hz	•	•	•

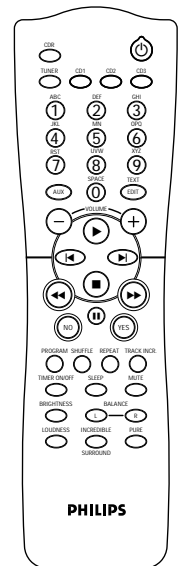

EAN: 87 10101 63193 6 (/21)
 EAN: 87 10101 63192 9 (/22)
 EAN: 87 10101 63195 0 (/37)

Product Dimensions:
 265mm W x 310mm H x 335mm D (center unit)
 240mm W x 310mm H x 250mm D (speakers)
 Package Dimensions:
 580mm W x 719mm H x 358mm D
 Product weight: approx. 22 kg
 Carton contains:

Printed in Singapore
 Date printed: Nov 1999
 Specifications subject to change without notice.
 © 1999 Royal Philips Electronics N.V.
 All rights reserved.

Incredible Surround™ is a Trademark of Philips Consumer Electronics Company
 In some countries, use of the CDR Mini Hi-Fi System as shown or suggested in this leaflet may require the authorization of copyright holders.

As an ENERGY STAR® Partner, Philips has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.
<http://www.philips.com>