

CD Mini System

FW320C

### 3 CD Changer Mini System

- 300 watts PMPO
- 2 x 10 watts Music Power
- 2 x 5 watts RMS Stereo
- **Digital Sound Control** (optimal, jazz, rock, techno)
- **Dynamic Bass Boost**
- **Full Range Bass Reflex Speaker System**
- 40-track CD Random Program
- **FM/MW/LW Digital Tuner with 40 presets** (LW /22)
- **Dual Tape Deck**
- **One touch CD synchro recording**
- **Easy set for radio**
- **Bedroom clock with wake-up**
- **24-key Remote Control**



300  
watts PMPO

2x10  
watts MPO



Let's make things better.



PHILIPS

# CD Mini System FW320C

## CD changer mini system

### standard product information

#### amplifier

- 300 watts PMPO
- 2 x 10 watts Music Power
- 2 x 5 watts RMS, ±10% THD, 3 Ohm, 1 kHz
- Digital Sound Control (optimal, jazz, rock, techno)
- Dynamic Bass Boost

#### compact disc player

- motorized front loading 3 CD changer
- bit-check D/A converter
- 40-track CD random program
- play modes (repeat/shuffle/program)
- change 2 discs while playing 1

#### tuner

- FM/MW/LW Digital Tuner with 40 presets (LW /22)
- easy set/auto store for radio

#### tape deck

- Dual Tape Deck
- high and normal speed dubbing
- CD synchro recording
- automatic recording level control
- electronic speed control

#### loudspeaker boxes

- full range Bass Reflex Speaker System
- 4" woofer
- hyper energy bass port for deep powerful bass reproduction

#### connections

- stereo headphones : 3.5mm stereo jack
- video/aux : cinch type sockets

#### general

- multicolor FTD display
- clock/timer
- wake-up with CD or tuner
- 24-key Remote Control

	/21M	/21	/22	/30	/34
Asia Pacific	•				
Australia/NZ					
Middle East/S Africa					
Latam					
Europe			•		
E Europe					
Mexico		•			
<b>tuner</b>					
FM65.81-74MHz					
FM87.5-108MHz	•	•	•		
MW522-1602kHz	•	•	•		
LW153-279kHz				•	
FM75 Ohm clickfit	•	•	•		
<b>mains supply</b>					
120/230V 50-60Hz	•	•			
230V/50Hz				•	
<b>general</b>					
made in sticker	•	•			



#### Digital Sound Control


(optimal, jazz, rock, techno)

Digital Sound Control (or DSC) offers different sound settings tailored for specific musical styles.



#### Dynamic Bass Boost

Boosting bass response as much as 8 decibels (nearly 3 times more than normal). Dynamic Bass Boost yields full rich tonal quality at all volume levels.

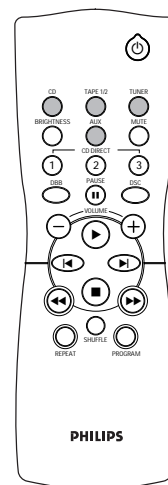

EAN: 87 10101 35740 9 (/22)  
 EAN: 87 10101 35743 0 (/21m)  
 EAN: 87 10101 35742 3 (/21)

Product Dimensions:  
 265mm W x 310mm H x 320mm D (center unit)  
 210mm W x 310mm H x 188mm D (speakers) (/21)  
 210mm W x 310mm H x 233mm D (speakers) (/22)  
 Package Dimensions:  
 594mm W x 410mm H x 416mm D (/21)  
 624mm W x 410mm H x 474mm D (/22)  
 Product weight: 12kg (/21)  
 : 14kg (/22)

Carton contains: CD Changer Mini System, Multi-Function Remote Control, Batteries (2 x AA), Operating instructions, Warranty information

Printed in Singapore  
 Date Printed : Sept 1998  
 Specifications subject to change without notice.  
 © 1998 Koninklijke Philips Electronics N.V.  
 All rights reserved.

<http://www.philips.com>

Let's make things better.



PHILIPS