

PhotoFrame Upgrade Procedure

For SPF5x08

1. Purpose:


Solve Auto on Timer not exact issue. (Set on timer).

2. Scope:


SPF5x08 (include SPF5008, SPF5208, etc.)

3. Procedure:



- a) Download compressed packet of upgrade file from Philips Website and decompress it.
- b) Copy the upgrade file (Philips_SPF5x08.bin; Philips_SPF5x08A.bin; Philips_SPF5x08B.bin) to the root directory of SD Card.
- c) Insert SD card and power on PhotoFrame.
- d) PhotoFrame will detect the upgrade file and display the below screen.

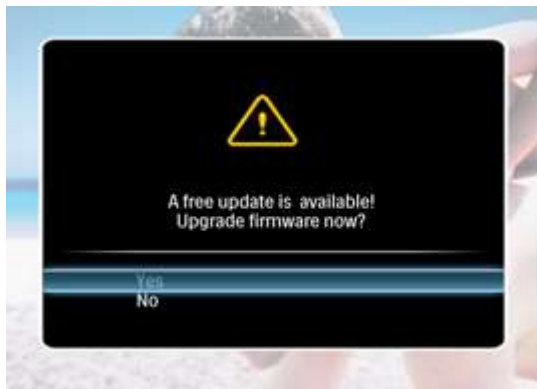

- e) Select <Yes> (default focus) and tap "OK" to perform the upgrade actions, PhotoFrame will display the below screen. (Please be careful not to remove the power until the process is completed!)

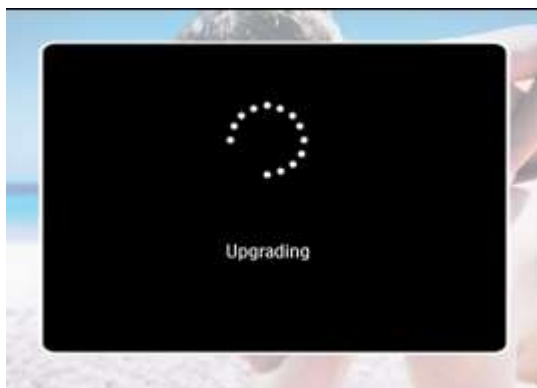

- f) After about 1 minute, PhotoFrame will complete upgrade and auto reboot.

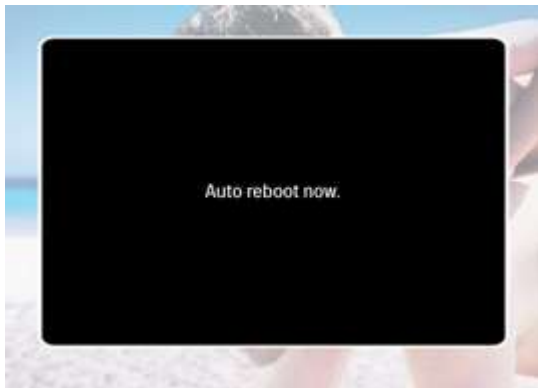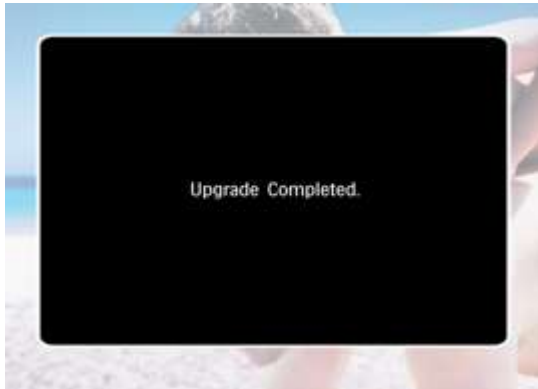

- g) After upgrade completed, PhotoFrame will automatically delete the corresponding upgrade file, so if need update multiple PhotoFrame, you can lock the SD card to keep the upgrade file.
- h) If upgrade fails found (as below picture displays), please re-copy the upgrade file (Philips_SPF5x08.bin, Philips_SPF5x08A.bin, Philips_SPF5x08B.bin) to the root of SD Card and try again.



- i) You can double check the version of PhotoFrame after update.
{Home Page} => tap "Menu" => {Quick Menu Page} => Select <Status> and tap "OK".



OR



OR

