



Philips Signage Solutions
Q-Line Display

43"

Direct LED Backlight
Full HD

SignageSolutions

BDL4335QL

Stand out

Easy-setup 16/7 display.

Inform and enthrall with a Philips Q-Line professional Full HD display. This reliable solution can be up and running as quickly as you need-with no additional hardware. Clear picture quality and Philips' unique Ambilight make an impression.

Brilliant picture. Reliable performance

- Full HD. Clear images. Crisp contrast
- Ambilight. Perfectly tuned ambient lighting

Effortless setup. Total control.

- CMND: Remote system management
- CMND & Control. Operate, monitor, maintain
- CMND & Create. Develop and launch your own content

Cost-effective system solution

- Energy-saving automatic backlight control
- Integrated media player. Easily schedule USB content
- Simple control. Remotely manage networked displays
- Internal memory. Upload content for instant play

PHILIPS

Highlights

CMND

Take control of your Philips Professional Display network. CMND lets you manage, maintain, and play via one easy-to-use interface. From installation to daily operation.

CMND & Control



Run your display network over a local (LAN) connection. CMND & Control allows you to perform vital functions like controlling inputs

and monitoring display status. Whether you're in charge of one screen or 100.

CMND & Create

Take control of your content with CMND & Create. A drag-and-drop interface makes it simple to publish your own content-whether it's a daily specials board or branded corporate information. Preloaded templates and integrated widgets ensure your stills, text, and video will be up and running in no time.

Integrated media player

Easily schedule content to play from USB. Your Philips Professional Display will wake from standby to play the content you want, and then return to standby once playback is done.

Internal memory

Save and play content without the need for a permanent external player. Your Philips professional display has an internal memory, which allows you to upload media into the display for instant playback. The internal memory also functions as a cache for online streaming.

SmartCollection

SmartCollection offers you customizable solutions to meet your specific requirements.

Both integrators and solution providers are offered the latest innovations, while the audience can enjoy impactful solutions. When developing smart innovations we focus on Caring, Innovative and Impactful solutions.

Specifications

Picture/Display

- Diagonal screen size: 42.5 inch / 108 cm
- Panel resolution: 1920x1080p
- Optimum resolution: 1920 x 1080 @ 60 Hz
- Brightness: 350 cd/m²
- Contrast ratio (typical): 3000:1
- Dynamic contrast ratio: 500,000:1
- Response time (typical): 6.5 ms
- Aspect ratio: 16:9
- Viewing angle (H / V): 178 / 178 degree
- Pixel pitch: 0.49 x 0.49 mm
- Display colors: 16.7 Million
- Ambientlight: 2-sided
- DICOM: Clinical D-image

Supported Display Resolution

Computer formats

| Resolution | Refresh rate |
|-------------|------------------|
| 640 x 480 | 60, 67, 72, 75Hz |
| 800 x 600 | 56, 60, 72, 75Hz |
| 1024 x 768 | 60Hz |
| 1280 x 768 | 60Hz |
| 1280 x 800 | 60Hz |
| 1360 x 768 | 60Hz |
| 1366 x 768 | 60Hz |
| 1440 x 900 | 60Hz |
| 1920 x 1080 | 60Hz |

Video formats

| Resolution | Refresh rate |
|------------|--------------|
| 480i | 60Hz |
| 480p | 60Hz |
| 576p | 50Hz |
| 576i | 50Hz |
| 720p | 50, 60Hz |
| 1080i | 50, 60Hz |
| 1080p | 50, 60Hz |

Connectivity

- Video input: DVI-D, HDMI, Component (RCA), Composite (RCA), VGA (Analog D-Sub)
- Audio input: 3.5 mm jack, Audio Left/Right (RCA)
- Audio output: Audio Left/Right (RCA), 3.5mm jack
- External control: RJ45, RS232C (in/out) 2.5 mm jack, IR (in/out) 3.5 mm jack
- Other connections: USB

Convenience

- Memory: Internal memory access, 8GB eMMC
- Screen saving functions: Pixel Shift
- Energy saving functions: Smart Power
- Tiled Matrix: Up to 15 x 15
- Start-up: Wake up on LAN, Switch on delay, Switch on status
- Start-up window: enable / disable Philips logo
- Keyboard control: Lockable, Hidden
- Network controllable: RS232, RJ45, One Wire (HDMI-CEC)
- Signal Loop Through: RS232, IR Loophrough

Dimensions

- Set dimensions (W x H x D): 968.2 x 559.4 x 59.9 mm
- Bezel width: 11.9 (TLR) / 14.9 (B) mm
- Set dimensions in inch (W x H x D): 38.12 x 22.02 x 2.36 inch
- VESA Mount: 400 x 400mm, 200x200 mm,M6
- Product weight: 8.70 kg
- Product weight (lb): 19.18 lb

Operating conditions

- Temperature range (operation): 5 ~ 40 °C
- Temperature range (storage): -20 ~ 60 °C
- Relative humidity: 20 ~ 80 %
- MTBF: 50,000 hour(s)

Power

- Consumption (On mode): 87 W (EnergyStar 6.0 test method)
- Mains power: 100 ~ 240 VAC
- Standby power consumption: <0.5 W

Sound

- Built-in speakers: 2 x 10W RMS

Multimedia Applications

- USB Playback Video: 3G2, 3GP, ASF, ASX, AVI, DAT, DivX, F4V, FLV, M2TS, M4V, MK3D, MKV, MOV, MP4, MPE, MPEG, MPG, MTS, QT, TRP, TS, TTS, VOB, WEBM, WVM, Xvid
- USB Playback Picture: BMP, GIF, JPEG, JPG
- USB Playback Audio: AAC, AC3, AIF, AIFF, AMR,


EC3, M4A, MP3, OGA, OGG, WAV, WMA

Accessories

- Included accessories: AC Power Cord, RS232 cable, VGA cable, Remote Control, Batteries for remote control, User manual on CD-ROM, Quick start guide

Miscellaneous

- Warranty: 3 year warranty
- On-Screen Display Languages: English, French, German, Italian, Polish, Russian, Spanish, Turkish, Simplified Chinese, Traditional Chinese
- Regulatory approvals: CE, CCC, UL/cUL, C-Tick, BSMI, CB, GOST, CECP, EPA

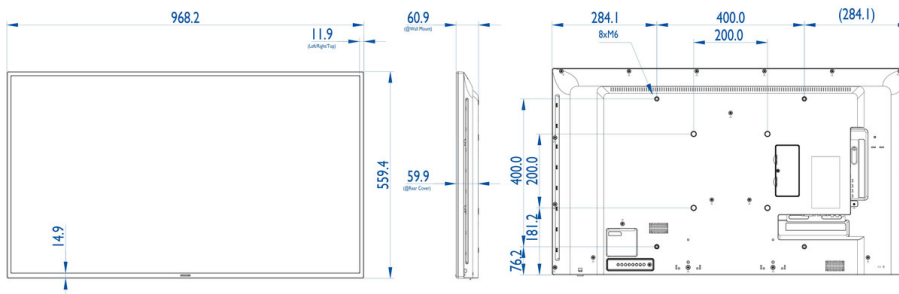

Issue date 2019-07-03

Version: 2.1.1

12 NC: 8670 001 26175
EAN: 87 12581 73400 8

© 2019 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com