



Philips
Video Wall Display

55"
Direct LED Backlight
Full HD

BDL5587XL

Create the most stunning video walls

with this LED zero bezel display

Create the most mesmerising video walls with our range of video wall models. With practically zero bezel and stunning full HD picture quality, you're sure to create the most memorable visual experience.

Optimized for public viewing

- Full HD LCD display, 1920x1080p
- Bezel-less design for stunning video walls
- High brightness for clearer images

High picture & video quality

- Advanced Color Calibration

Operational flexibility

- Direct LED Backlight
- Designed for 24/7 operation
- Smart insert in the backcover to place a small pc
- Smart Control Software Suite
- DVI Daisy Chain
- Portrait mode operability
- Keep your content up and running with FailOver
- IR Passthrough

PHILIPS

Highlights

Direct LED Backlight

Enjoy superior light uniformity with a direct LED backlight which gives you even greater contrast ratios. Purer whites bring an even wider color gamut enhancing the color rendering, making your viewing experience more enjoyable than ever before. And with substantially lower power consumption, your overall TCO is lower too.

Bezel-less design

Create the most stunning video walls with zero bezel displays. Configurable in a formation of up to 15 x 10 displays, and with some of the narrowest mullions in the industry, you will hardly notice the gap between the pictures, giving you the most incredible and memorable visual experience.

High brightness

Enjoy a clearer image in areas with greater ambient brightness thanks to the 800 nit panel. Your audience can enjoy better image quality in locations that are away from direct sunlight yet still brighter than average, optimizing the viewing experience.

Advanced Color Calibration

Ensure a uniform color across all displays installed in your network thanks to our

advanced color calibration tool. This tool will automatically adjust all displays in your signage application to ensure the ultimate in color consistency to give your audience the most memorable visual experience.

Smart Insert

Professional PC's are part of most public signage installations. Quite often they increase the overall depth to the display and cause a lot of cable clutter. So we have designed this display with Smart insert in the back cover which is ideal for the integration of a professional small form factor PC. On top of that, the cable management system offers a great solution to keep your cables neat and professional looking.

Smart Control

Control and manage all of the signage displays on your network with this powerful software tool which allows you to change the settings of your display centrally via an RJ45 or RS232 connection. Smart Control allows you to set the video input, modify the color settings, set the display's ID when creating video walls and even diagnose each display's status, giving you all the power you need to manage your displays from one central location.

DVI Daisy Chain

Create a digital video wall of up to 150 displays in a 15 x 10 configuration with a DVI daisy chain. Simply connect the DVI Out port to a DVI in of another display to create the most stunning video wall experience around.

IR Passthrough

Control all displays in your signage network through one single remote control, via the primary display. Simple and convenient, this means you don't have to worry about other displays changing configuration settings when using your remote control unit.

Portrait mounting possible


This display is also able to be safely and reliably mounted in portrait position.

Designed for 24/7 operation

Because business never sleeps, our signage displays are designed for 24/7 use. Taking advantage of superior components to ensure a higher level of quality, you can count on this range of models for complete around-the-clock reliability.

Energy Star 5.0

Energy Star certification ensures that you are buying a product which meets the latest power efficiency standards which operates with maximum power efficiency at all operational levels. Philips Signage Displays are certified for Energy Star 5.0 specifications and meet or exceed the standard.



Specifications

Picture/Display

- Panel resolution: 1920x1080p
- Brightness: 800 cd/m²
- Response time (typical): 10 ms
- Contrast ratio (typical): 1400:1
- Aspect ratio: 16:9
- Pixel pitch: 0.63 x 0.63 mm
- Display colors: 1.06 Billion
- Picture enhancement: 3/2 - 2/2 motion pull down, 3D Combfilter, Motion compens. deinterlacing, Progressive scan, 3D MA deinterlacing, Dynamic contrast enhancement
- Viewing angle (H / V): 178 / 178 degree
- Diagonal screen size: 54.6 inch / 138.7 cm
- Optimum resolution: 1920 x 1080 @ 60 Hz

Connectivity

- PC: VGA-in D-Sub 15HD, VGA-out D-Sub 15HD, DVI-D x1, RS232 D-Sub9, RS232 D-sub9 output, 3.5 mm PC audio input x1, RJ45
- AV input: HDMI x1, DVI-D x1, Component (BNC) x1, IR in, Audio (L/R) x2
- Other connections: DVI Out, USB, AC-out, Display Port, External loudspeaker connector, IR out
- AV output: Audio (L/R) x1

Supported Display Resolution

Computer formats

Resolution	Refresh rate
640 x 480	60, 67, 72, 75Hz
800 x 600	56, 60, 72, 75Hz
1024 x 768	60Hz
1280 x 768	60Hz
1280 x 800	60Hz
1280 x 1024	60Hz
1360 x 768	60Hz
1366 x 768	60Hz
1440 x 900	60Hz
1600 x 1200	60Hz
1920 x 1080	60Hz
1920 x 1200	60Hz

Video formats

Resolution	Refresh rate
480i	60Hz
480p	60Hz
576p	50Hz
576i	50Hz
720p	50, 60Hz

1080i	50, 60Hz
1080p	50, 60Hz

Dimensions

- Set dimensions (W x H x D): 1215.2 x 686 x 125.35 mm
- Wall Mount: 400 x 200 mm
- MTBF: 60,000 hrs
- Product weight: 33 kg
- Bezel width (A to A): 5.1 mm
- Bezel width (L/T, R/B): 3.3 mm, 1.8 mm

Power

- Standby power consumption: <1W
- Consumption (Typical): 145 W

Operating conditions

- Temperature range (operation): 0 - 40 °C
- Relative humidity: 10 - 90 %

Convenience

- Signal loop through: DVI, RS232, VGA, IR Loophrough
- Network controllable: RS232, RJ45, HDMI (One Wire)
- Placement: Portrait, Landscape
- Picture in picture: PIP
- Energy saving functions: Smart Power
- Tiled Matrix: Up to 15 x 10
- Keyboard control: Hidden, Lockable
- Ease of installation: AC Out, Carrying Handles, Smart Insert
- Packaging: Reusable box
- Remote control signal: Lockable
- Safety control functions: Heat Control, Temperature Sensor
- OSD Languages: English, French, German, Italian, Portuguese, Spanish, Dutch, Polish, Turkish, Simplified Chinese, Russian, Swedish
- Picture performance: Advanced color control
- Screen saving functions: Pixel shift, Low bright

Sound


- Built-in speakers: 2 x 12W (RMS)

Accessories

- Included accessories: Remote Control, Batteries for remote control, AC Power Cord, VGA cable, User manual on CD-ROM, Quick start guide

Miscellaneous

- On-Screen Display Languages: English, French, German, Italian, Polish, Turkish, Russian, Simplified Chinese
- Regulatory approvals: CE, FCC, Class B, UL/cUL, CCC, C-Tick, RoHS
- Warranty: Global: 3 years

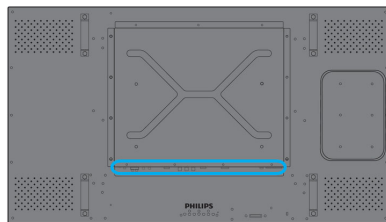

Issue date 2022-07-14

Version: 2.5.1

12 NC: 8670 000 95162
EAN: 87 12581 66000 0

© 2022 Koninklijke Philips N.V.
All Rights reserved.

Specifications are subject to change without notice.
Trademarks are the property of Koninklijke Philips N.V.
or their respective owners.

www.philips.com